

Jago 匠光

906 导轨射灯

Track spot light technical data sheet


906 匠光线形导轨射灯为简约式LED灯具，采用优质铝合金型材灯体，无螺丝压铸铝端盖，表面细沙氧化，阻燃PC透镜+阻燃PC防眩罩，灯具线条硬朗美观、外观尺寸比例科学，结构合理，安装维护方便灵活。灯具结合TIR控光技术，实现精准控制与高效率传递的统一，软开关技术体验耐贝西曲线舒缓而渐入佳境。先进的热管理技术，散热优异，确保了灯具最大光输出的持续性及色温的一致性。

应用场所：写字楼、学校、医院、高档超市、商场、酒店等公共建筑。

906 series track spot light linear LED luminaire, housing made of high pressure extruded aluminum construction, die-cast aluminum end caps with no visible screws, Surface treatment is the sand oxidation and Flame retardant PC lens + flame retardant PC anti-glare cover, UV and corrosion resistance, with beautiful appearance, the scientific proportion and reasonable dimensions, flexible installing methods, light body, excellent heat dissipation. The luminaire adopted TIR optic-control technology, achieve unification between precise control and high efficiency. Getting better with the "Lumbency curve" that brought by unique soft switch technology. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximize output lumens.

Applications: Office, Educational Institutes, Hospitals, Warehouses, Hospitality, Retailers Etc.

产品细节 Details

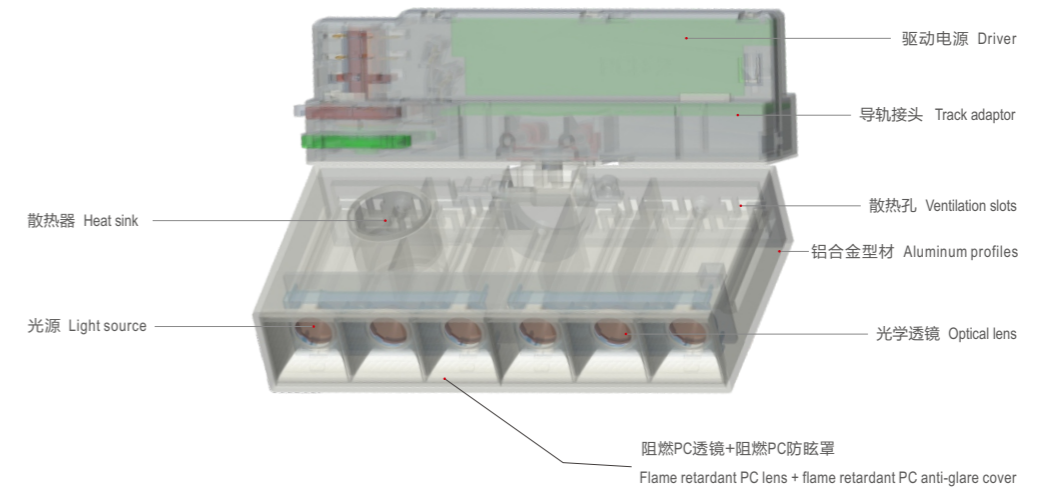






规格参数 Technical Data

名称: 906 导轨射灯
 类型: 导轨射灯
 灯体材料: 优质铝合金
 表面处理: 细沙氧化(银色/褐色/哑光黑) 哑光粉末喷涂(哑光白)
 控光面罩: 阻燃PC透镜+阻燃PC防眩罩
 光源: SMD
 整灯光效: 80 lm/W
 显色指数: >90
 色温: 3000K / 4000K / 6500K
 输入电压: 220V / 50Hz
 驱动电源: 高转换率驱动电源
 灯具寿命: 3万小时
 电气等级: II

Product name: 906 Track spot light
 Type: Track spot light
 Housing material: High-quality Aluminum alloy
 Surface finish: Fine sand oxidation (silver/brown gray/black) Matte powder coating (matte white)
 Diffuser material: Flame retardant PC lens + flame retardant PC anti-glare cover
 Light source: SMD
 Luminaire efficiency: 80 lm/W
 CRI: >90
 Color temperature: 3000K / 4000K / 6500K
 Input voltage: 220V / 50Hz
 Driver: High efficiency driver
 Lifespan: 30000h
 Electrical grade: II






标准灯具 Standard single fitting

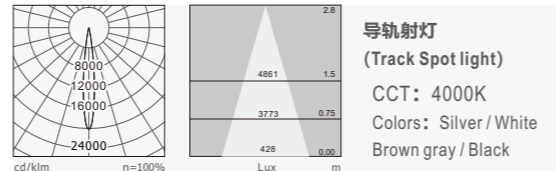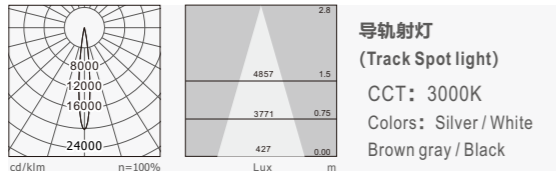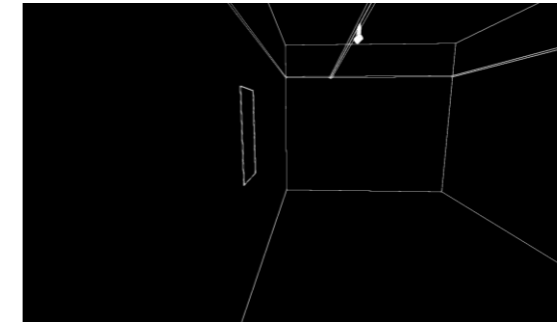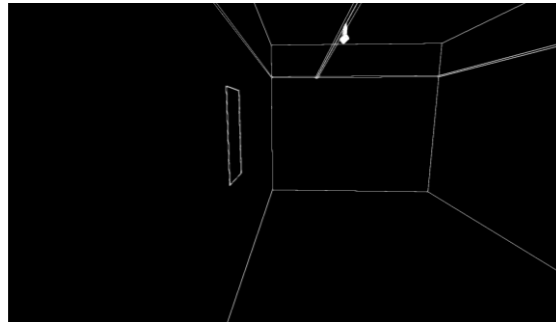



| Item No | Power Flux | Beam angle | L*W*H |
|--------------|--------------|------------|-----------|
| 906-TM88T10W | 10W / 800 lm | 12° | 88*34*118 |

| Item No | Power Flux | Beam angle | L*W*H |
|--------------|--------------|------------|-----------|
| 906-TM88T10W | 10W / 820 lm | 12° | 88*34*118 |

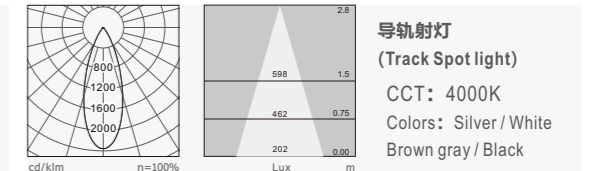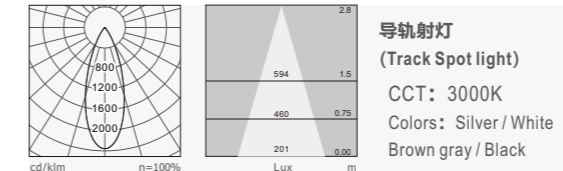



| Item No | Power Flux | Beam angle | L*W*H |
|--------------|--------------|------------|-----------|
| 906-TM88T10W | 10W / 800 lm | 36° | 88*34*118 |

| Item No | Power Flux | Beam angle | L*W*H |
|--------------|--------------|------------|-----------|
| 906-TM88T10W | 10W / 820 lm | 36° | 88*34*118 |

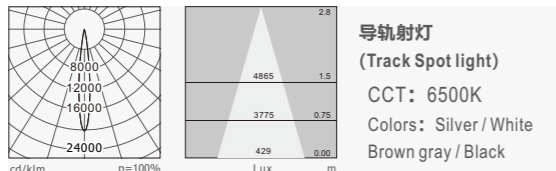






| Item No | Power Flux | Beam angle | L*W*H |
|--------------|--------------|------------|-----------|
| 906-TM88T10W | 10W / 840 lm | 12° | 88*34*118 |

| Item No | Power Flux | Beam angle | L*W*H |
|--------------|--------------|------------|-----------|
| 906-TM88T10W | 10W / 840 lm | 12° | 88*34*118 |

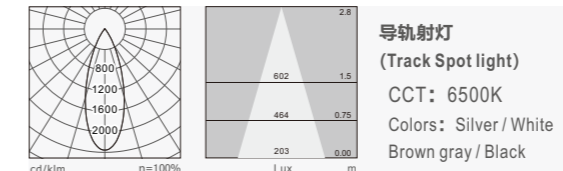



| Item No | Power Flux | Beam angle | L*W*H |
|--------------|--------------|------------|-----------|
| 906-TM88T10W | 10W / 840 lm | 36° | 88*34*118 |

| Item No | Power Flux | Beam angle | L*W*H |
|--------------|--------------|------------|-----------|
| 906-TM88T10W | 10W / 840 lm | 36° | 88*34*118 |

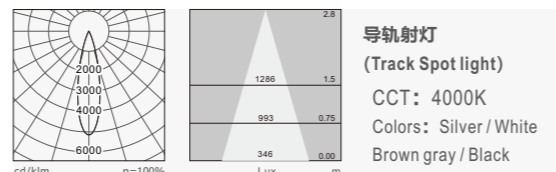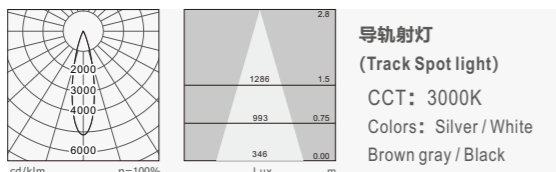



| Item No | Power Flux | Beam angle | L*W*H |
|--------------|--------------|------------|-----------|
| 906-TM88T10W | 10W / 800 lm | 24° | 88*34*118 |

| Item No | Power Flux | Beam angle | L*W*H |
|--------------|--------------|------------|-----------|
| 906-TM88T10W | 10W / 820 lm | 24° | 88*34*118 |

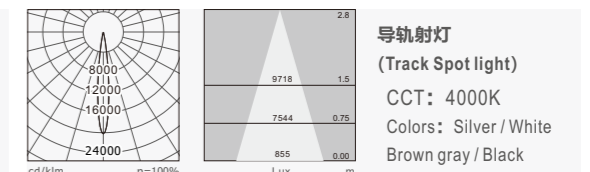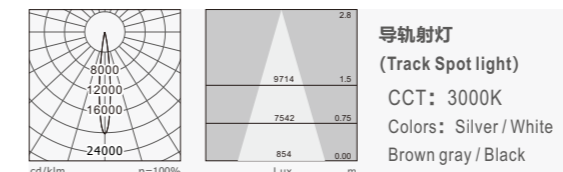



| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM166T20W | 20W / 1600 lm | 12° | 166*34*132 |

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM166T20W | 20W / 1620 lm | 12° | 166*34*132 |

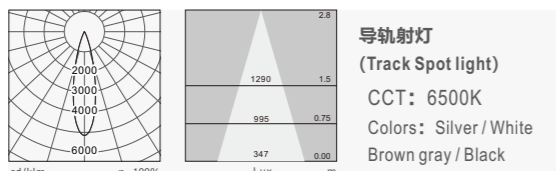



| Item No | Power Flux | Beam angle | L*W*H |
|--------------|--------------|------------|-----------|
| 906-TM88T10W | 10W / 840 lm | 24° | 88*34*118 |

| Item No | Power Flux | Beam angle | L*W*H |
|--------------|--------------|------------|-----------|
| 906-TM88T10W | 10W / 840 lm | 24° | 88*34*118 |


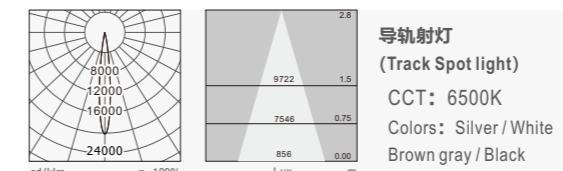



| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM166T20W | 20W / 1640 lm | 12° | 166*34*132 |

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM166T20W | 20W / 1640 lm | 12° | 166*34*132 |






标准灯具 Standard single fitting

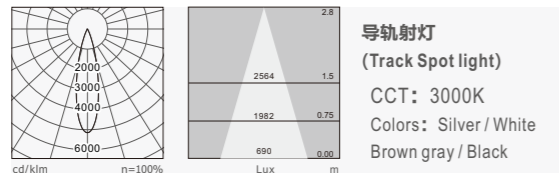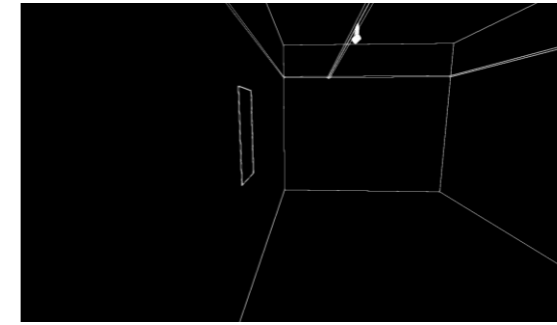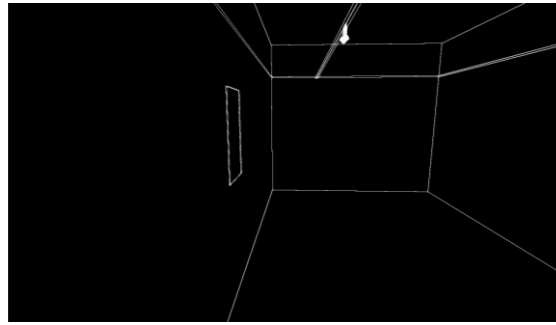


导轨射灯
 (Track Spot light)
 CCT: 3000K
 Colors: Silver / White
 Brown gray / Black

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM166T20W | 20W / 1600 lm | 24° | 166*34*132 |






导轨射灯
 (Track Spot light)
 CCT: 4000K
 Colors: Silver / White
 Brown gray / Black

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM166T20W | 20W / 1620 lm | 24° | 166*34*132 |

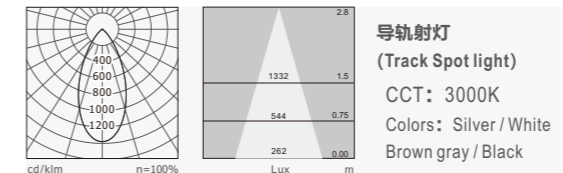


导轨射灯
 (Track Spot light)
 CCT: 3000K
 Colors: Silver / White
 Brown gray / Black

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM166T20W | 20W / 1600 lm | 48° | 166*34*132 |






导轨射灯
 (Track Spot light)
 CCT: 4000K
 Colors: Silver / White
 Brown gray / Black

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM166T20W | 20W / 1620 lm | 48° | 166*34*132 |

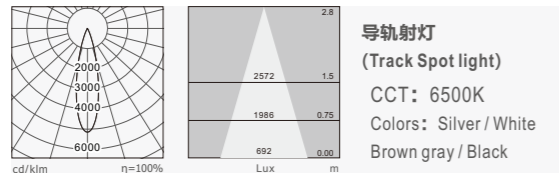




导轨射灯
 (Track Spot light)
 CCT: 6500K
 Colors: Silver / White
 Brown gray / Black

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM166T20W | 20W / 1640 lm | 24° | 166*34*132 |

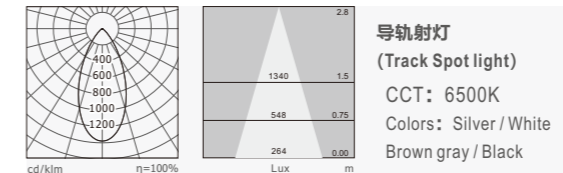




导轨射灯
 (Track Spot light)
 CCT: 6500K
 Colors: Silver / White
 Brown gray / Black

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM166T20W | 20W / 1640 lm | 48° | 166*34*132 |

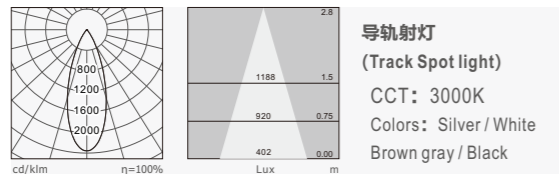


导轨射灯
 (Track Spot light)
 CCT: 3000K
 Colors: Silver / White
 Brown gray / Black

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM166T20W | 20W / 1600 lm | 36° | 166*34*132 |






导轨射灯
 (Track Spot light)
 CCT: 4000K
 Colors: Silver / White
 Brown gray / Black

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM166T20W | 20W / 1620 lm | 36° | 166*34*132 |

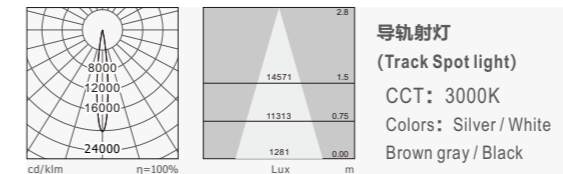


导轨射灯
 (Track Spot light)
 CCT: 3000K
 Colors: Silver / White
 Brown gray / Black

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM247T30W | 30W / 2400 lm | 12° | 247*34*149 |






导轨射灯
 (Track Spot light)
 CCT: 4000K
 Colors: Silver / White
 Brown gray / Black

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM247T30W | 30W / 2420 lm | 12° | 247*34*149 |

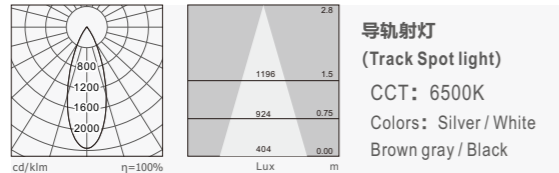



导轨射灯
 (Track Spot light)
 CCT: 6500K
 Colors: Silver / White
 Brown gray / Black

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM166T20W | 20W / 1640 lm | 36° | 166*34*132 |

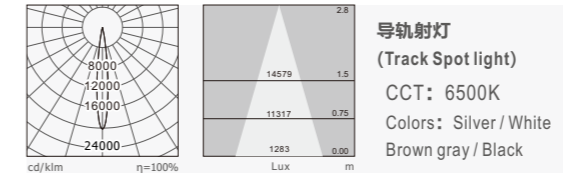




导轨射灯
 (Track Spot light)
 CCT: 6500K
 Colors: Silver / White
 Brown gray / Black

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM247T30W | 30W / 2440 lm | 12° | 247*34*149 |






标准灯具 Standard single fitting

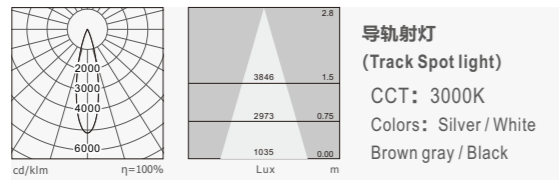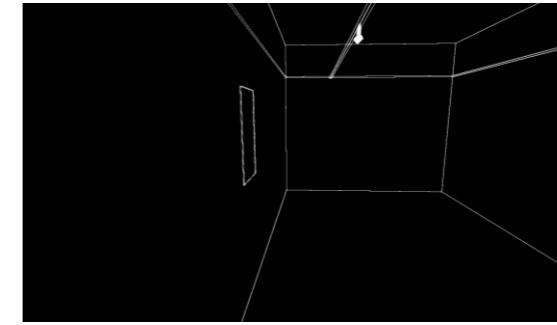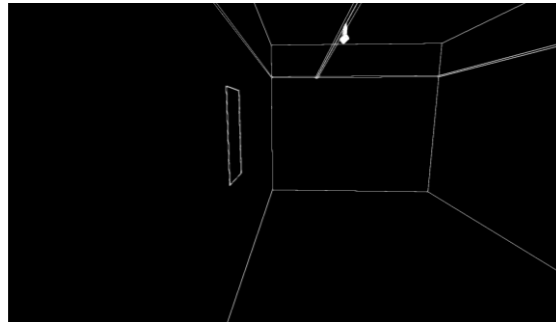


导轨射灯
 (Track Spot light)
 CCT: 3000K
 Colors: Silver / White
 Brown gray / Black

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM247T30W | 30W / 2400 lm | 24° | 247*34*149 |






导轨射灯
 (Track Spot light)
 CCT: 4000K
 Colors: Silver / White
 Brown gray / Black

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM247T30W | 30W / 2420 lm | 24° | 247*34*149 |

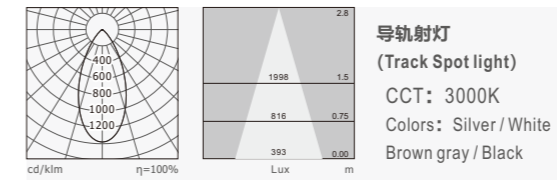


导轨射灯
 (Track Spot light)
 CCT: 3000K
 Colors: Silver / White
 Brown gray / Black

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM247T30W | 30W / 2400 lm | 48° | 247*34*149 |






导轨射灯
 (Track Spot light)
 CCT: 4000K
 Colors: Silver / White
 Brown gray / Black

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM247T30W | 30W / 2420 lm | 48° | 247*34*149 |






导轨射灯
 (Track Spot light)
 CCT: 6500K
 Colors: Silver / White
 Brown gray / Black

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM247T30W | 30W / 2440 lm | 48° | 247*34*149 |

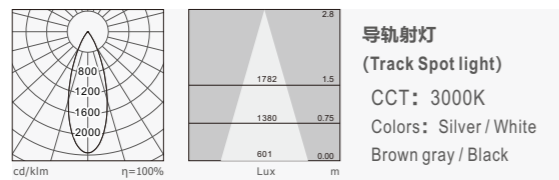


导轨射灯
 (Track Spot light)
 CCT: 3000K
 Colors: Silver / White
 Brown gray / Black

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM247T30W | 30W / 2400 lm | 36° | 247*34*149 |



导轨射灯
 (Track Spot light)
 CCT: 4000K
 Colors: Silver / White
 Brown gray / Black

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM247T30W | 30W / 2420 lm | 36° | 247*34*149 |



导轨射灯
 (Track Spot light)
 CCT: 6500K
 Colors: Silver / White
 Brown gray / Black

| Item No | Power Flux | Beam angle | L*W*H |
|---------------|---------------|------------|------------|
| 906-TM247T30W | 30W / 2440 lm | 36° | 247*34*149 |

关联产品 Related products



P051



P059