



VICTOR SUSPENDED LUMINAIRE 737

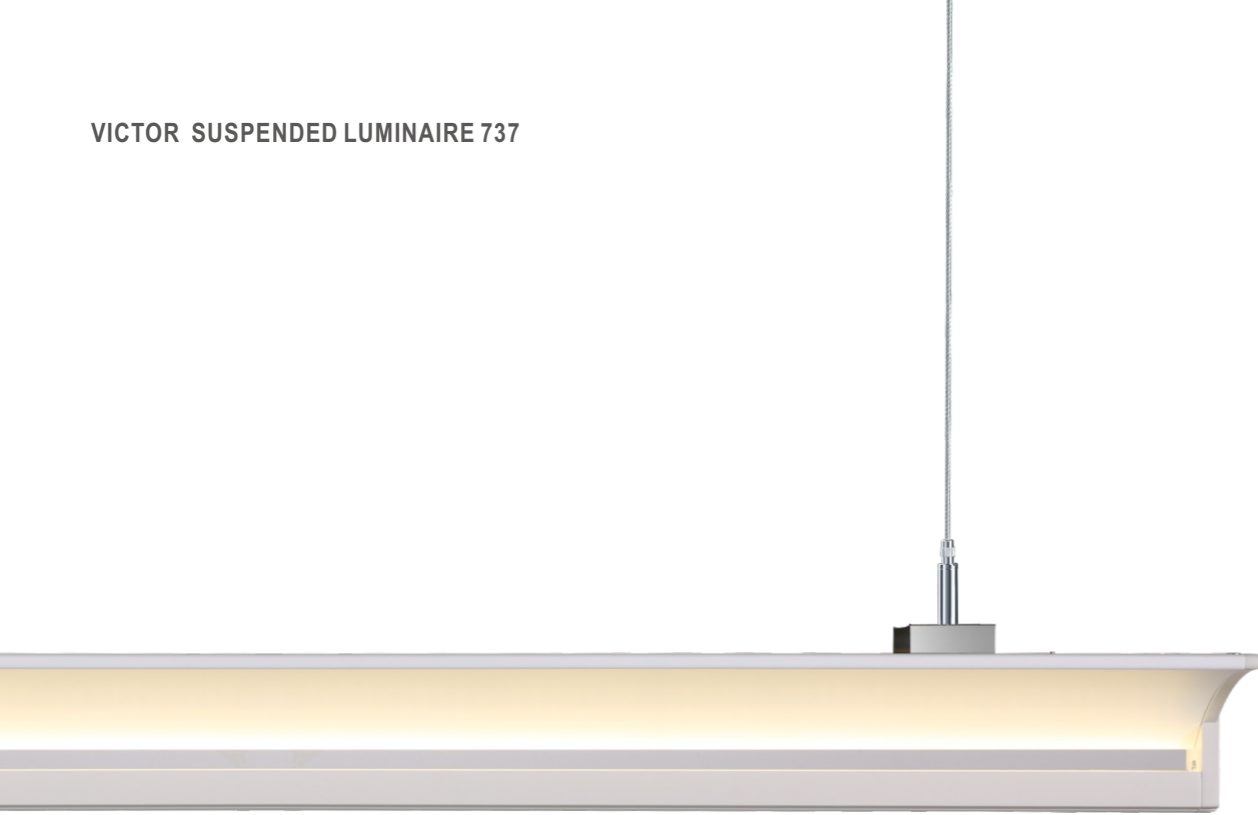

产品细节 Details

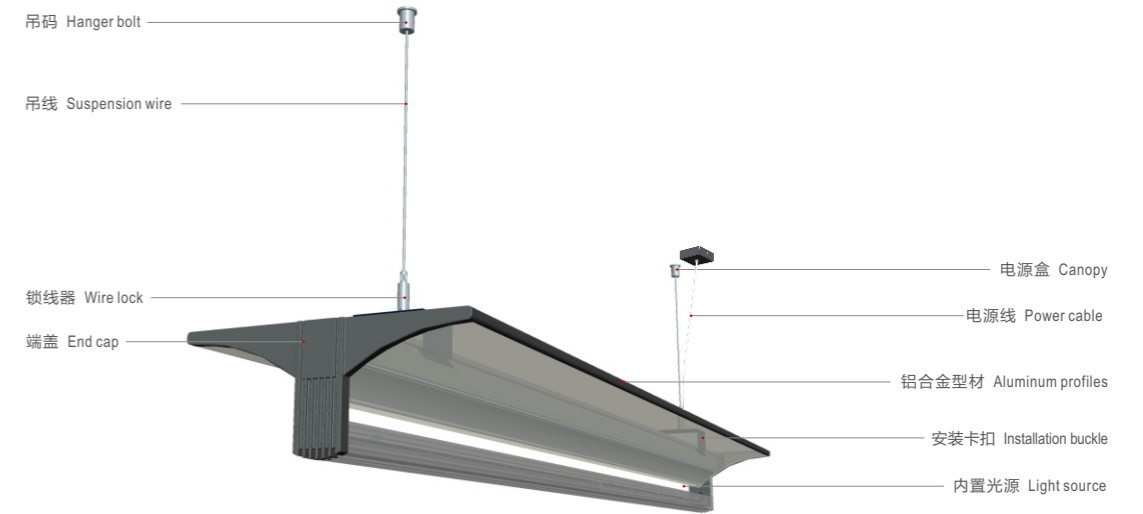

规格参数 Technical Data

名称: 737 吊灯
 类型: 吊灯
 灯体材料: 优质铝合金
 表面处理: 纳米喷涂
 控光面罩: PMMA
 光源: SMD
 整灯光效: 95 lm/W
 显色指数: ≥83
 色温: 3000K/4000K/6500K
 输入电压: 220-240V
 驱动电源: 高转换率驱动电源
 灯具寿命: 3万小时
 电气等级: I

Product name: 737 Suspended luminaire
Type: Suspended
Housing material: High-quality Aluminum alloy
Surface finish: Nanoflex
Diffuser material: PMMA
Light source: SMD
Luminaire efficiency: 95 lm/W
CRI: ≥83
Color temperature: 3000K / 4000K / 6500K
Input voltage: 220-240V
Driver: High efficiency driver
Lifespan: 30000h
Electrical grade: I

Victor 维克多

737 吊灯

Suspended luminaires technical data sheet





维克多737吊灯，采用创新的整体铝合金结构。外观尺寸比例科学，灯具线条流畅美观。反射飞翼采用Nanoflex®纳米喷涂技术，以实现灯具最高效率，二次反射型灯具，出光柔和无阴影，扩散角度广，先进的热管理技术，散热效果优异，确保了灯具最大光输出的持续性及色温的一致性。应用场所：写字楼、学校、医院、高档超市、酒店、商场、公共建筑等。

737 series suspended with an innovative aluminum extrusion structure design with two wings in Nanoflex powder coating technology to achieve the maximum output efficiency and makes soft and shadow free light output via secondary reflection and wider beam angle. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximize output lumens.

Applications: Offices, schools, hospitals, hotels, shopping malls, public buildings etc.

Indoor 室内适用	General lighting 基础照明	High efficiency 高光效	Long life 长寿命	Anti glare 防眩光	Accurate light distribution 准配光
No flickering 无频闪	IP 20 Protection level 防护等级	Protective grounding 保护接地	Fire protection 防火	Low lumen depreciation 低光衰	color-temp changing 调色温驱动电源
Microwave sensor 微波感应控制	Emergency kits 应急照明组件	DALI	light control 光控	Wifi or Ble, Zigbee	1-10V 1-10V dimming 1-10V调光
China Compulsory Certification 3C认证	CE certification CE认证	CB certification CB认证			


标准灯具 Standard single fitting

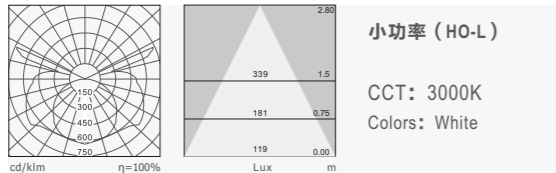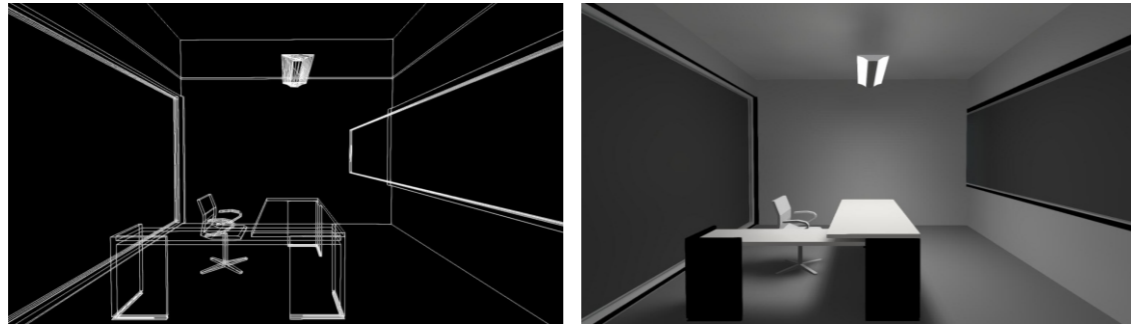

小功率 (HO-L)

CCT: 3000K
Colors: White


Item No	Power Flux	L*W*H
737-SM1140T36W	36W / 3420 lm	1140*220*93

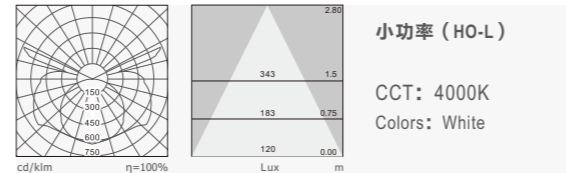

小功率 (HO-L)

CCT: 4000K
Colors: White

Item No	Power Flux	L*W*H
737-SM1140T36W	36W / 3440 lm	1140*220*93

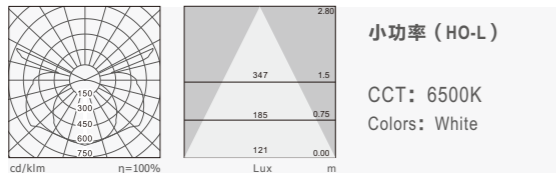


小功率 (HO-L)


CCT: 6500K
Colors: White

Item No	Power Flux	L*W*H
737-SM1140T36W	36W / 3460 lm	1140*220*93

关联产品 Related products



P141



P145




P145

应用参考 Application reference

Open space: 10m x 10m x 3m; reflectance (%) : ceiling80/wall50/floor20/ floor ceiling walls; illuminance is the average lux level on 0.75m working surface; "H" is the fittings installation height

开放式空间: 10m x 10m x 3m; 反射率(%): 天花板 80/墙壁50/地板20; 照度为 0.75m工作面平均照度; H为灯具 安装离地高度。

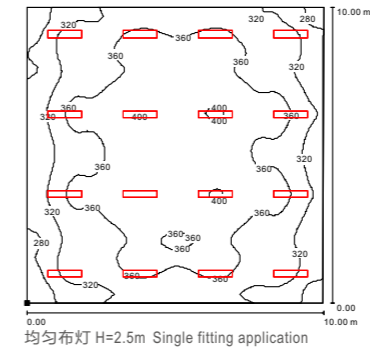

Item No	Power Flux	Number	W/m ²	H=2.8m Illuminance(Lux)
737-SM1140T36W	36W / 3420 lm	16	5.76	348



Victor
维克多系列
737吊灯
公共场所实景图