


产品细节 Details

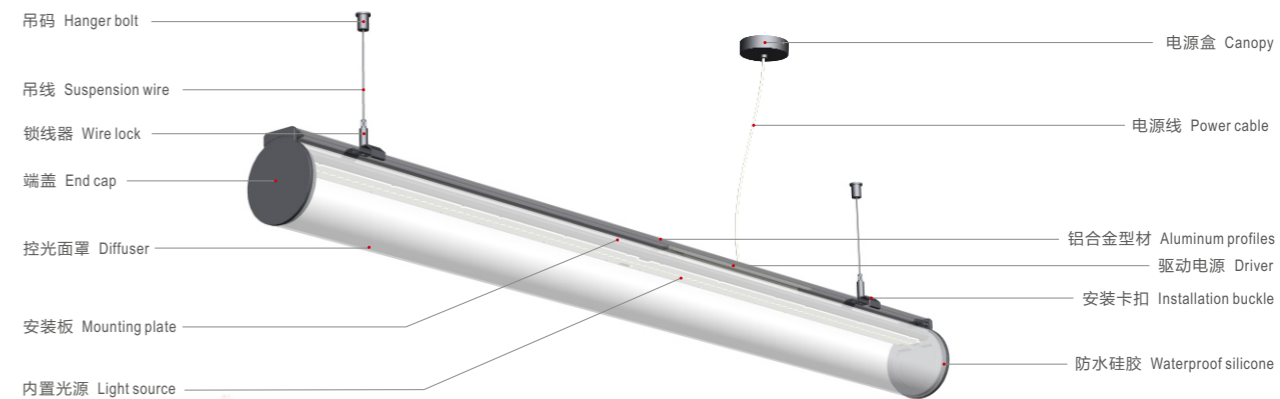

规格参数 Technical Data

名称: 702 吊灯  
类型: 吊灯  
灯体材料: 优质铝合金  
表面处理: 静电喷涂  
控光面罩: PMMA  
光源: SMD  
整灯光效: 115 lm/W  
显色指数: ≥83  
色温: 3000K/4000K/6500K  
输入电压: 220-240V  
驱动电源: 高转换率驱动电源  
灯具寿命: 3万小时  
电气等级: I

**Product name:** 702 Suspended luminaire  
**Type:** Suspended  
**Housing material:** High-quality Aluminum alloy  
**Surface finish:** Electrostatic thermo-painting  
**Diffuser material:** PMMA  
**Light source:** SMD  
**Luminaire efficiency:** 115 lm/W  
**CRI:** ≥83  
**Color temperature:** 3000K / 4000K / 6500K  
**Input voltage:** 220-240V  
**Driver:** High efficiency driver  
**Lifespan:** 30000h  
**Electrical grade:** I

Niman 尼曼


702 吊灯

Suspended luminaires technical data sheet




702 系列线型吊灯，外观简约大方，采用线形优质铝型材灯体，无螺丝压铸铝端盖，灯体轻，散热优异。圆管状透光罩可提供270度照明、出光均匀无阴影。先进的热管理技术确保了灯具最大光输出的持续性及色温的一致性。  
应用场所：写字楼、学校、医院、高档超市、商场、公共建筑等。

702 series linear light, simple and concise look, high quality extruded aluminum housing, die-cast aluminum end caps with no visible screws and round tubular diffuser which provides 270° illumination and smooth uniform appearance. Advanced Thermal Management ensures maximum lumen maintenance and consistent color temperature.

Application: offices, Educational Institutes, Hospitals, Warehouses, Hospitality, Retails, etc.

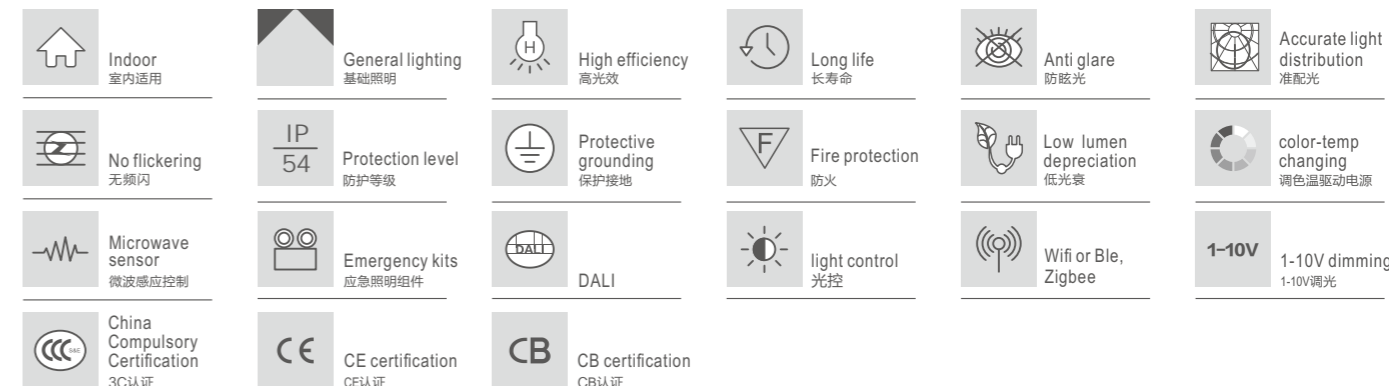



标准灯具 Standard single fitting

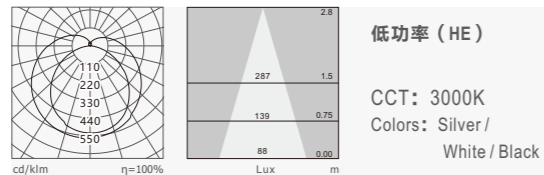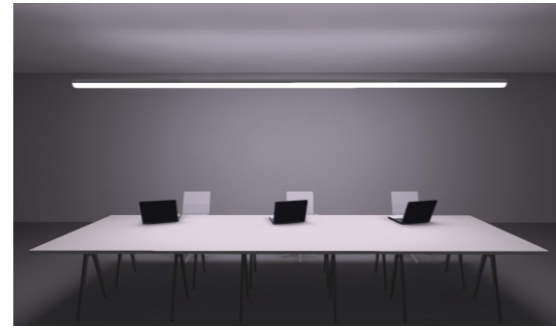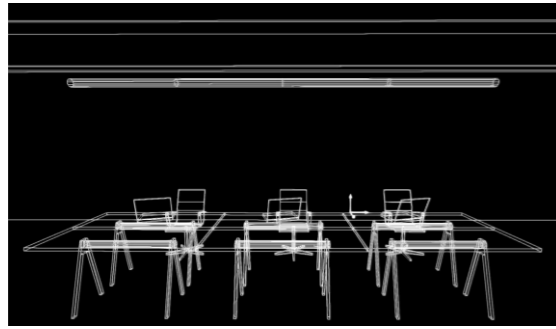

低功率 (HE)

CCT: 3000K  
Colors: Silver /  
White / Black



Item No	Power   Flux	L*W*H
702-SS1147T18W	18W / 2070 lm	1147*90*100
702-SS1707T27W	27W / 3105 lm	1707*90*100



低功率 (HE)

CCT: 4000K  
Colors: Silver /  
White / Black


Item No	Power   Flux	L*W*H
702-SS1147T18W	18W / 2090 lm	1147*90*100
702-SS1707T27W	27W / 3125 lm	1707*90*100

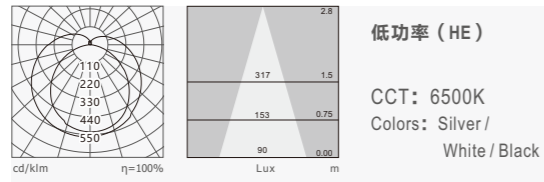

低功率 (HE)

CCT: 6500K  
Colors: Silver /  
White / Black



Item No	Power   Flux	L*W*H
702-SS1147T18W	18W / 2110 lm	1147*90*100
702-SS1707T27W	27W / 3145 lm	1707*90*100

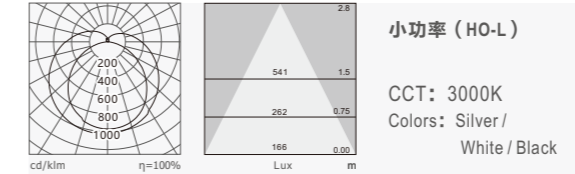

小功率 (HO-L)

CCT: 3000K  
Colors: Silver /  
White / Black



Item No	Power   Flux	L*W*H
702-SS1147T36W	36W / 4140 lm	1147*90*100
702-SS1707T54W	54W / 6210 lm	1707*90*100



小功率 (HO-L)

CCT: 4000K  
Colors: Silver /  
White / Black

Item No	Power   Flux	L*W*H
702-SS1147T36W	36W / 4160 lm	1147*90*100
702-SS1707T54W	54W / 6230 lm	1707*90*100

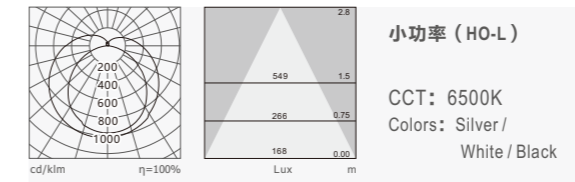

小功率 (HO-L)


CCT: 6500K  
Colors: Silver /  
White / Black

Item No	Power   Flux	L*W*H
702-SS1147T36W	36W / 4180 lm	1147*90*100
702-SS1707T54W	54W / 6250 lm	1707*90*100

应用参考 Application reference

**Open space:** 10m x 10m x 3m; reflectance (%): ceiling80/wall50/floor20/ floor ceiling walls; illuminance is the average lux level on 0.75m working surface; "H" is the fittings installation height

**开放式空间:** 10m x 10m x 3m; 反射率(%): 天花板 80/墙壁50/地板20; 照度为 0.75m工作面平均照度; H为灯具 安装离地高度。

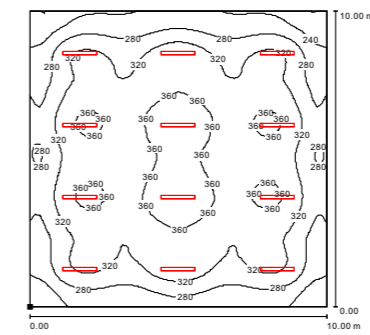

均匀布灯 H=2.5m Single fitting application

Item No	Power   Flux	Number	W/m <sup>2</sup>	H=2.8m Illuminance(Lux)
702-SS1147T36W	36W / 4140 lm	12	4.32	316



Niman 尼曼系列 702吊灯 实景图

