


产品细节 Details

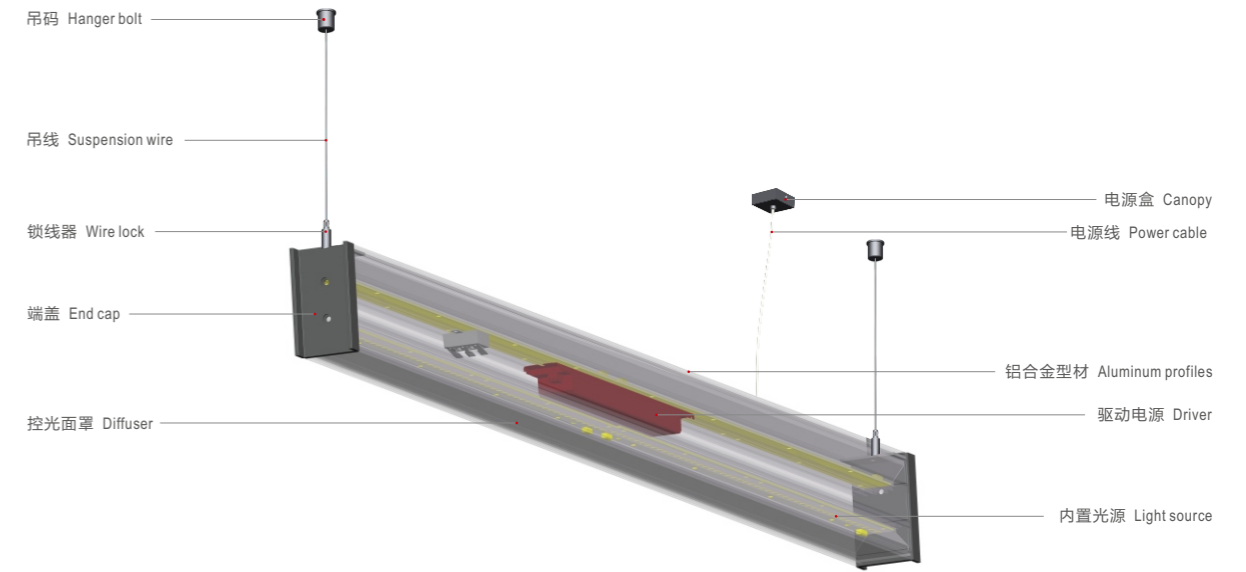

规格参数 Technical Data

名称: 730B 吊灯
 类型: 吊灯
 灯体材料: 优质铝合金
 表面处理: 静电烤漆
 控光面罩: PMMA
 光源: SMD
 整灯光效: 90 lm/W
 显色指数: ≥83
 色温: 3000K/4000K/6500K
 输入电压: 220-240V
 驱动电源: 高转换率驱动电源
 灯具寿命: 3万小时
 电气等级: I

Product name: 730B Suspended luminaire
Type: Suspended
Housing material: High-quality Aluminum alloy
Surface finish: Electrostatic thermo-painting
Diffuser material: PMMA
Light source: SMD
Luminaire efficiency: 90 lm/W
CRI: ≥83
Color temperature: 3000K / 4000K / 6500K
Input voltage: 220-240V
Driver: High efficiency driver
Lifespan: 30000h
Electrical grade: I

Elita 艾丽塔

730B 吊灯/系统灯带












Suspended luminaires/
 continuous lighting system technical data sheet

730B 艾丽塔线型吊灯, 采用优质铝合金型材灯体, 模块化产品可组合成吊灯系统, 创新的整体结构, 纤细的灯体, 是对传统LED灯设计的彻底颠覆。简单, 高雅的模块化系统, 可配合531系列LED射灯, 将静态的基础照明与重点照明结合成独一无二的整体。多种组合方式可选, 无论是直线形, L形, T形, 还是十字形, 均可将照明和建筑需求整合于同一方案。







应用场所: 写字楼、学校、医院、高档超市、酒店、商场、公共建筑、机场车站等。

730B series linear suspended luminaire, housing made of high quality pressure extruded aluminum construction, also the modularized structure can make this lamp systematic available. The innovative integrated structure and slim lamp body means great breakthrough in LED lamp design. The simple and graceful 730B can be combined with the 531 series spot light in which way you can integrate the static basic lighting with the accent lighting. Options: straight module, L shape module, T shape module, crossed module;

Application: Office building, school, hospital, supermarket, mall, hotel, and other public area and facility.


 Indoor 室内适用	 General lighting 基础照明	 High efficiency 高光效	 Long life 长寿命	 Anti glare 防眩光	 Accurate light distribution 准配光
 No flickering 无频闪	 Protection level 防护等级	 Protective grounding 保护接地	 Fire protection 防火	 Low lumen depreciation 低光衰	 color-temp changing 调色温驱动电源
 Microwave sensor 微波感应控制	 Emergency kits 应急照明组件	 DALI	 light control 光控	 Wifi or Ble, Zigbee	 1-10V 1-10V dimming 1-10V调光
 China Compulsory Certification 3C认证	 CE certification CE认证	 CB certification CB认证			

标准灯具 Standard single fitting

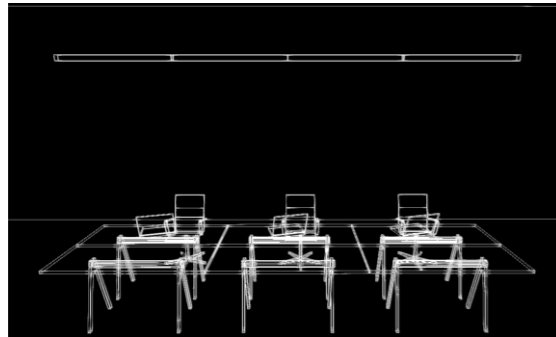



**上下照吊灯
(Up&down light)**
CCT: 3000K
Colors: Silver /
White / Black

Item No	Power Flux	L*W*H
730BU-SS1170T36W	36W / 3240 lm	1170*50*88
730BU-SS2290T72W	72W / 6480 lm	2290*50*88






**上下照吊灯
(Up&down light)**
CCT: 4000K
Colors: Silver /
White / Black

Item No	Power Flux	L*W*H
730BU-SS1170T36W	36W / 3260 lm	1170*50*88
730BU-SS2290T72W	72W / 6500 lm	2290*50*88






**上下照吊灯
(Up&down light)**
CCT: 6500K
Colors: Silver /
White / Black

Item No	Power Flux	L*W*H
730BU-SS1170T36W	36W / 3280 lm	1170*50*88
730BU-SS2290T72W	72W / 6520 lm	2290*50*88






**下照吊灯
(Down light only)**
CCT: 3000K
Colors: Silver /
White / Black

Item No	Power Flux	L*W*H
730B-SS1170T18W	18W / 1620 lm	1170*50*88
730B-SS1170T27W	27W / 2430 lm	1170*50*88
730B-SS2290T36W	36W / 3240 lm	2290*50*88



**下照吊灯
(Down light only)**
CCT: 4000K
Colors: Silver /
White / Black

Item No	Power Flux	L*W*H
730B-SS11700T18W	18W / 1640 lm	1170*50*88
730B-SS1170T27W	27W / 2450 lm	1170*50*88
730B-SS2290T36W	36W / 3260 lm	2290*50*88



**下照吊灯
(Down light only)**
CCT: 6500K
Colors: Silver /
White / Black

Item No	Power Flux	L*W*H
730B-SS1170T18W	18W / 1660 lm	1170*50*88
730B-SS1170T27W	27W / 2470 lm	1170*50*88
730B-SS2290T36W	36W / 3280 lm	2290*50*88

关联产品 Related products



P175




→
Elite
艾丽塔系列
730B吊灯
公共场所实景图


光带转接头 Connection module

	端部转接头 End-module		I形转接头 I-module		L形转接头 L-module	
Item No	Power	L*W*H	Item No	Power	L*W*H	
730B-SE-10W	10W	70*60*88	730B-SI-10W	10W	80*60*88	
	T形转接头 T-module		X转接头 X-module	Item No	Power	L*W*H
730B-ST-10W	10W	80*70*88	730B-SX-10W	10W	80*80*88	

线形光带示意图 Linear continuous connection demonstration

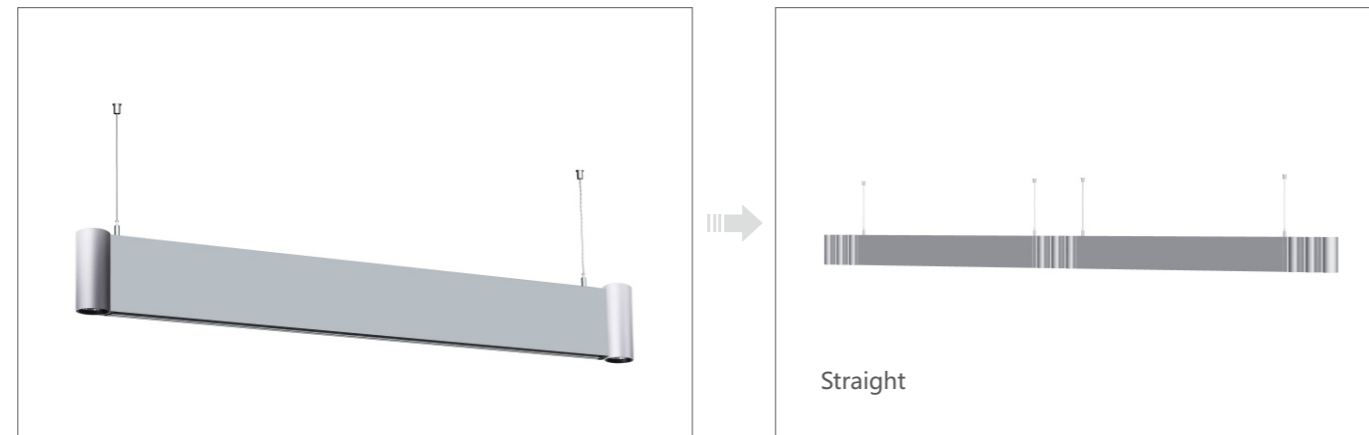


组合光带示意图 System combination demonstration

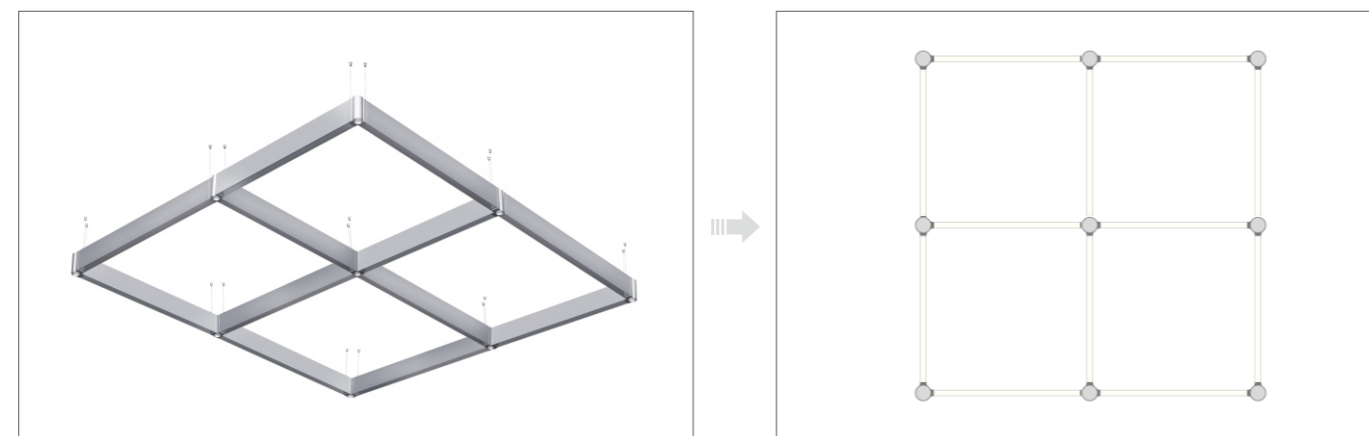

应用参考 Application reference

Open space: 10m x 10m x 3m; reflectance (%): ceiling80/wall50/floor20/ floor ceiling walls; illuminance is the average lux level on 0.75m working surface; "H" is the fittings installation height

开放式空间: 10m x 10m x 3m; 反射率(%): 天花板 80/墙壁50/地板20; 照度为 0.75m工作面平均照度; H为灯具安装离地高度。

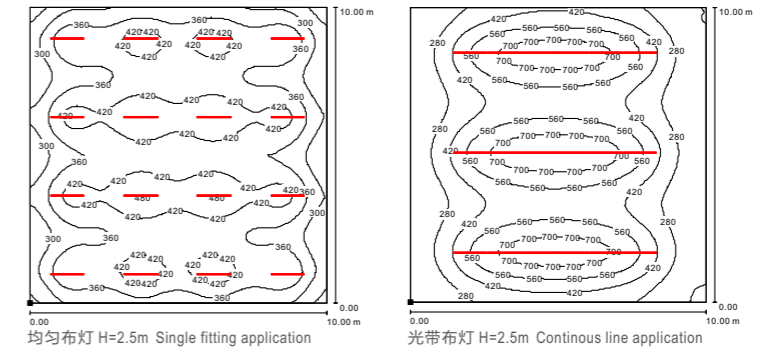

Item No	Power Flux	Number	W/m ²	H=2.8m Illuminance(Lux)
730B-SS1170T36W	36W / 3240 lm	16	5.76	377
730B-SS7200T216W	144W / 19440 lm	3	6.48	451



→
Elite
艾丽塔系列
730B吊灯
办公场所实景图