

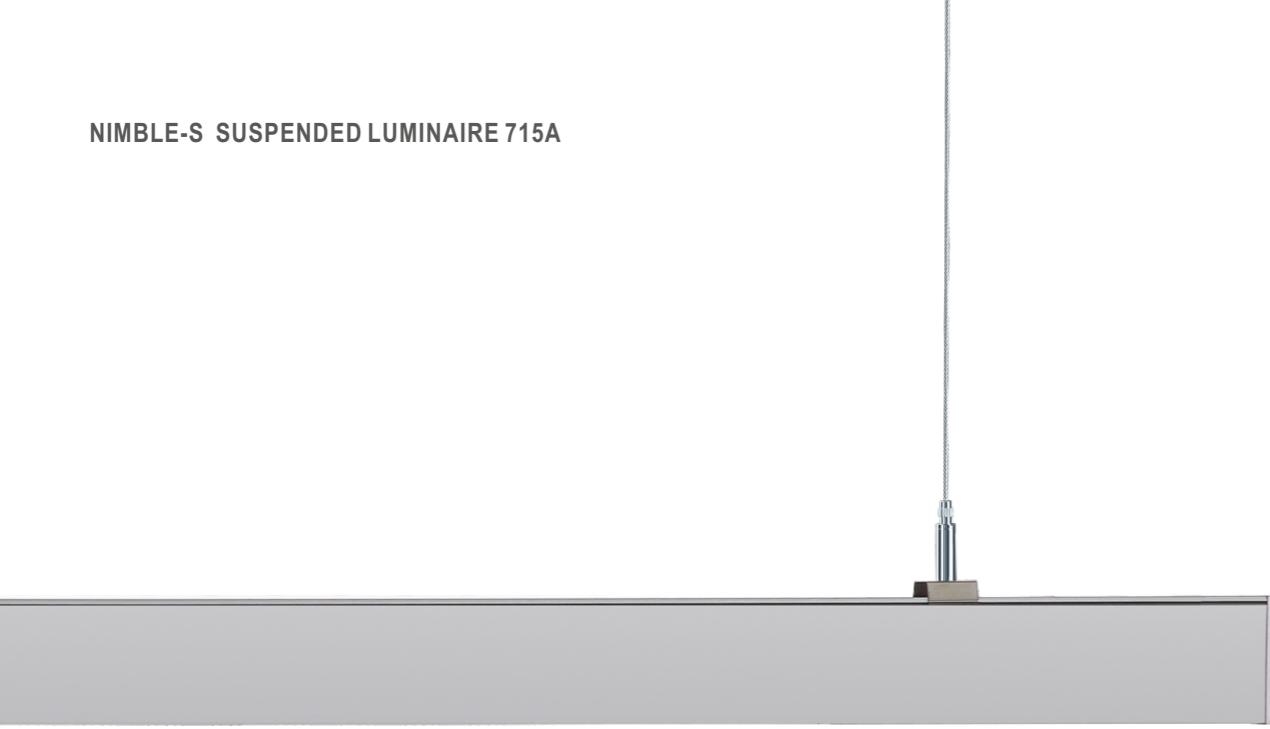


# NIMBLE-S SUSPENDED LUMINAIRE 715A

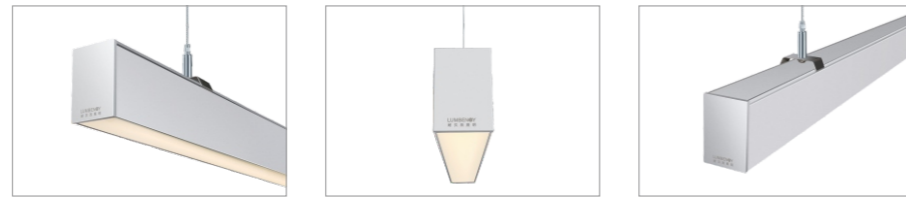

## 产品细节 Details

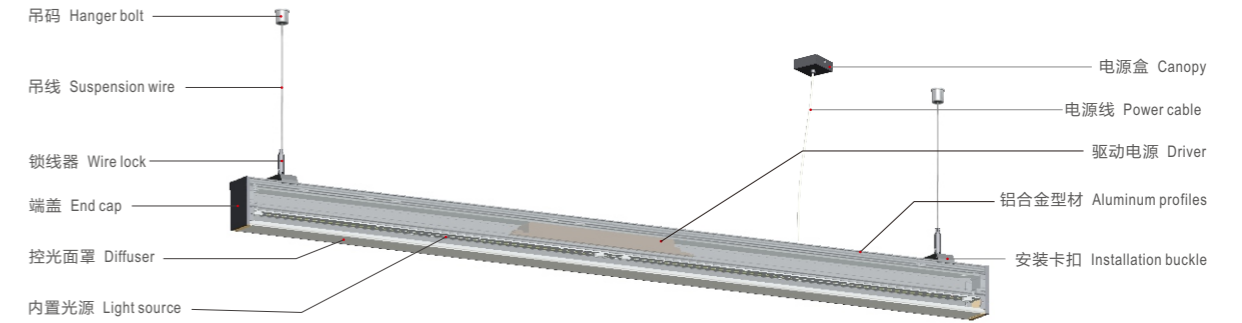

## 规格参数 Technical Data

名称: 715A 吊灯  
 类型: 吊灯  
 灯体材料: 优质铝合金  
 表面处理: 静电喷涂  
 控光面罩: PC  
 光源: SMD  
 整灯光效: 80 lm/W  
 显色指数: ≥83  
 色温: 3000K / 4000K / 6500K  
 输入电压: 220-240V  
 驱动电源: 高转换率驱动电源  
 灯具寿命: 3万小时  
 电气等级: I

**Product name:** 715A Suspended luminaire  
**Type:** Suspended  
**Housing material:** High-quality Aluminum alloy  
**Surface finish:** Electrostatic thermo-painting  
**Diffuser material:** PC  
**Light source:** SMD  
**Luminaire efficiency:** 80 lm/W  
**CRI:** ≥83  
**Color temperature:** 3000K / 4000K / 6500K  
**Input voltage:** 220-240V  
**Driver:** High efficiency driver  
**Lifespan:** 30000h  
**Electrical grade:** I

## Nimble-s 尼博

### 715A 吊灯/线型灯带

Suspended luminaires/  
 continuous lighting system technical data sheet






715A 尼博线形吊灯为简约式LED灯具, 采用优质铝合金型材灯体, 无螺丝压铸铝端盖, 灯具线条硬朗美观、外观尺寸比例科学, 结构合理, 安装维护方便灵活。灯具结合了耐贝西创新的直接照明+间接照明的照明理念, 运用防眩光灯罩控光, 防眩光效果好, PC控光面罩根据LED光波长开发, 出光均匀无阴影, 控光面罩与灯体完美结合使整个灯具更加美观。先进的热管理技术, 散热优异, 确保了灯具最大光输出的持续性及色温的一致性。  
 应用场所: 写字楼、学校、医院、高档超市、商场、酒店等公共建筑。

715A series suspend mounted linear LED luminaire, housing made of high pressure extruded aluminum construction, die-cast aluminum end caps with no visible screws, UV and corrosion resistance, with beautiful appearance, the scientific proportion and reasonable dimensions, flexible installing methods, light body, excellent heat dissipation. The luminaire combined with the concept of indirect/direct lighting distributions, applying anti-glare diffuser and double transmission principle of secondary reflection, high transmittance PMMA diffuser specially designed for LED light source creating smooth and uniform lighting distributions high visual comfort for all lighting applications, without visible dark spot or light gaps in seamless continuous lighting system. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximize output lumens.

Applications: Office, Educational Institutes, Hospitals, Warehouses, Hospitality, Retailers Etc.



Indoor 室内适用	General lighting 基础照明	High efficiency 高光效	Long life 长寿命	Anti glare 防眩光	Accurate light distribution 准配光
No flickering 无频闪	IP 20 Protection level 防护等级	Protective grounding 保护接地	Fire protection 防火	Low lumen depreciation 低光衰	color-temp changing 调色温驱动电源
Microwave sensor 微波感应控制	Emergency kits 应急照明组件	DALI	light control 光控	Wifi or Ble, Zigbee	1-10V 1-10V dimming 1-10V调光
China Compulsory Certification 3C认证	CE certification CE认证	CB certification CB认证			

标准灯具 Standard single fitting

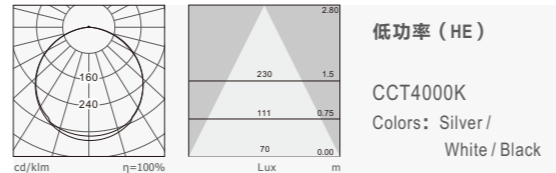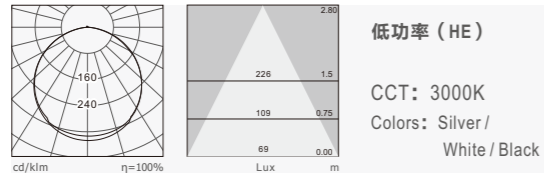

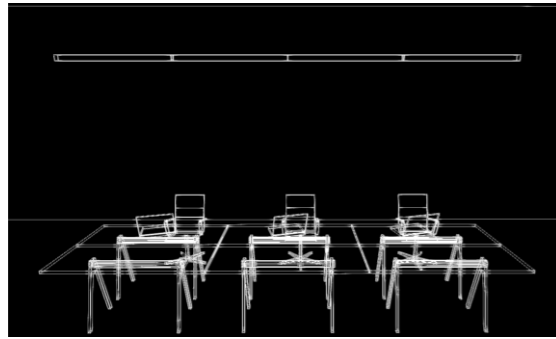


Item No	Power   Flux	L*W*H
715A-SS1150T18W	18W / 1440 lm	1150*43*64
715A-SS1710T27W	27W / 2160 lm	1710*43*64
715A-SS2270T36W	36W / 2880 lm	2270*43*64

Item No	Power   Flux	L*W*H
715A-SS1150T18W	18W / 1460 lm	1150*43*64
715A-SS1710T27W	27W / 2180 lm	1710*43*64
715A-SS2270T36W	36W / 2900 lm	2270*43*64


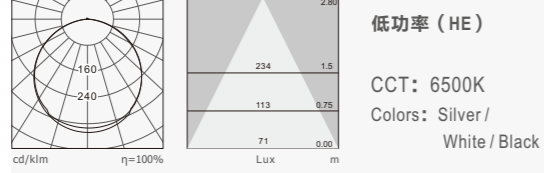



Item No	Power   Flux	L*W*H
715A-SS1150T18W	18W / 1480 lm	1150*43*64
715A-SS1710T27W	27W / 2200 lm	1710*43*64
715A-SS2270T36W	36W / 2920 lm	2270*43*64

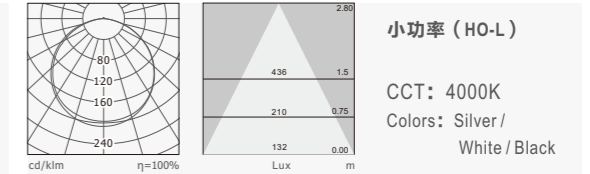
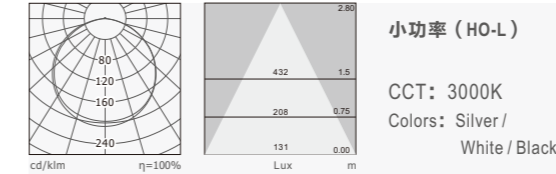



Item No	Power   Flux	L*W*H
715A-SS1150T36W	36W / 2880 lm	1150*43*64
715A-SS1710T54W	54W / 4320 lm	1710*43*64
715A-SS2270T72W	72W / 5760 lm	2270*43*64

Item No	Power   Flux	L*W*H
715A-SS1150T36W	36W / 2900 lm	1150*43*64
715A-SS1710T54W	54W / 4340 lm	1710*43*64
715A-SS2270T72W	72W / 5780 lm	2270*43*64

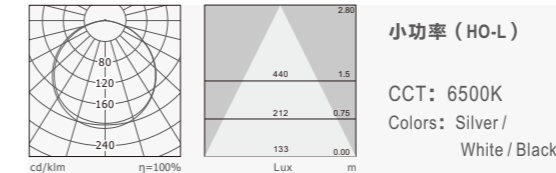




Item No	Power   Flux	L*W*H
715A-SS1150T36W	36W / 2920 lm	1150*43*64
715A-SS1710T54W	54W / 4360 lm	1710*43*64
715A-SS2270T72W	72W / 5800 lm	2270*43*64

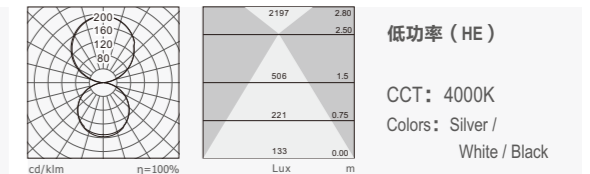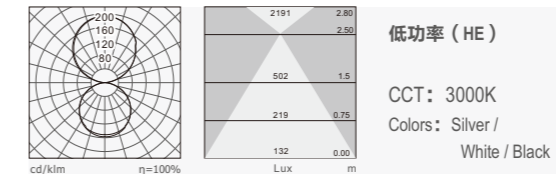

Item No	Power   Flux	L*W*H
715AU-SS1150T36W	36W / 2880 lm	1150*43*64
715AU-SS1710T54W	54W / 4320 lm	1710*43*64
715AU-SS2270T72W	72W / 5760 lm	2270*43*64

Item No	Power   Flux	L*W*H
715AU-SS1150T36W	36W / 2900 lm	1150*43*64
715AU-SS1710T54W	54W / 4340 lm	1710*43*64
715AU-SS2270T72W	72W / 5780 lm	2270*43*64

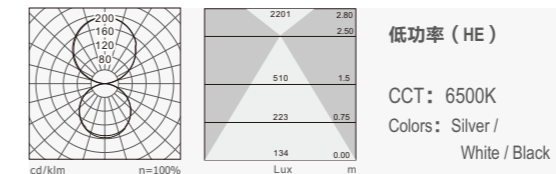

Item No	Power   Flux	L*W*H
715AU-SS1150T36W	36W / 2920 lm	1150*43*64
715AU-SS1710T54W	54W / 4360 lm	1710*43*64
715AU-SS2270T72W	72W / 5800 lm	2270*43*64


配件 Accessories

 <p><b>715A 快速光带连接件</b> 715A Quick continuous connector</p> <p>Colors: Silver</p>	 <p><b>电源线顶盒</b> Power cable canopy</p> <p>Colors: Silver / White</p>	 <p><b>吊码吊绳1.5M</b> Suspension wire 1.5m+hanger bolt</p> <p>Colors: Silver</p>
 <p><b>锁线器</b> Wire lock</p> <p>Colors: Silver</p>	 <p><b>安装卡扣</b> Installation buckle</p> <p>Colors: Silver</p>	

应用参考 Application reference


**Open space:** 10m x 10m x 3m; reflectance (%): ceiling80/wall50/floor20/ floor ceiling walls; illuminance is the average lux level on 0.75m working surface; "H" is the fittings installation height

**开放式空间:** 10m x 10m x 3m; 反射率(%): 天花板 80/墙壁50/地板20; 照度为 0.75m工作面平均照度; H为灯具安装离地高度。


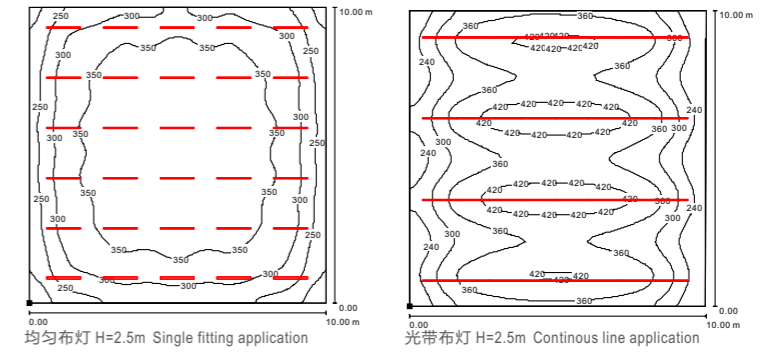


Item No	Power   Flux	Number	W/m <sup>2</sup>	H=2.8m Illuminance(Lux)
715A-SS1150T18W	18W / 1440 lm	36	6.48	326
715A-SS9600T144W	144W / 15120 lm	4	4.32	346

线形光带示意图 Linear continuous connection demonstration

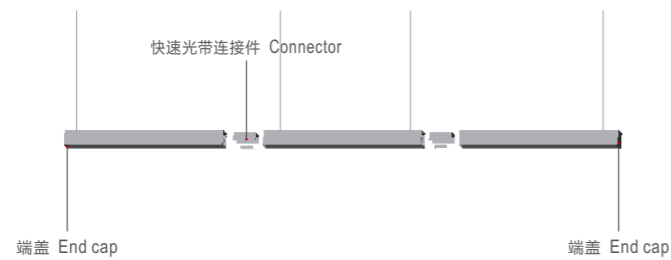

关联产品 Related products

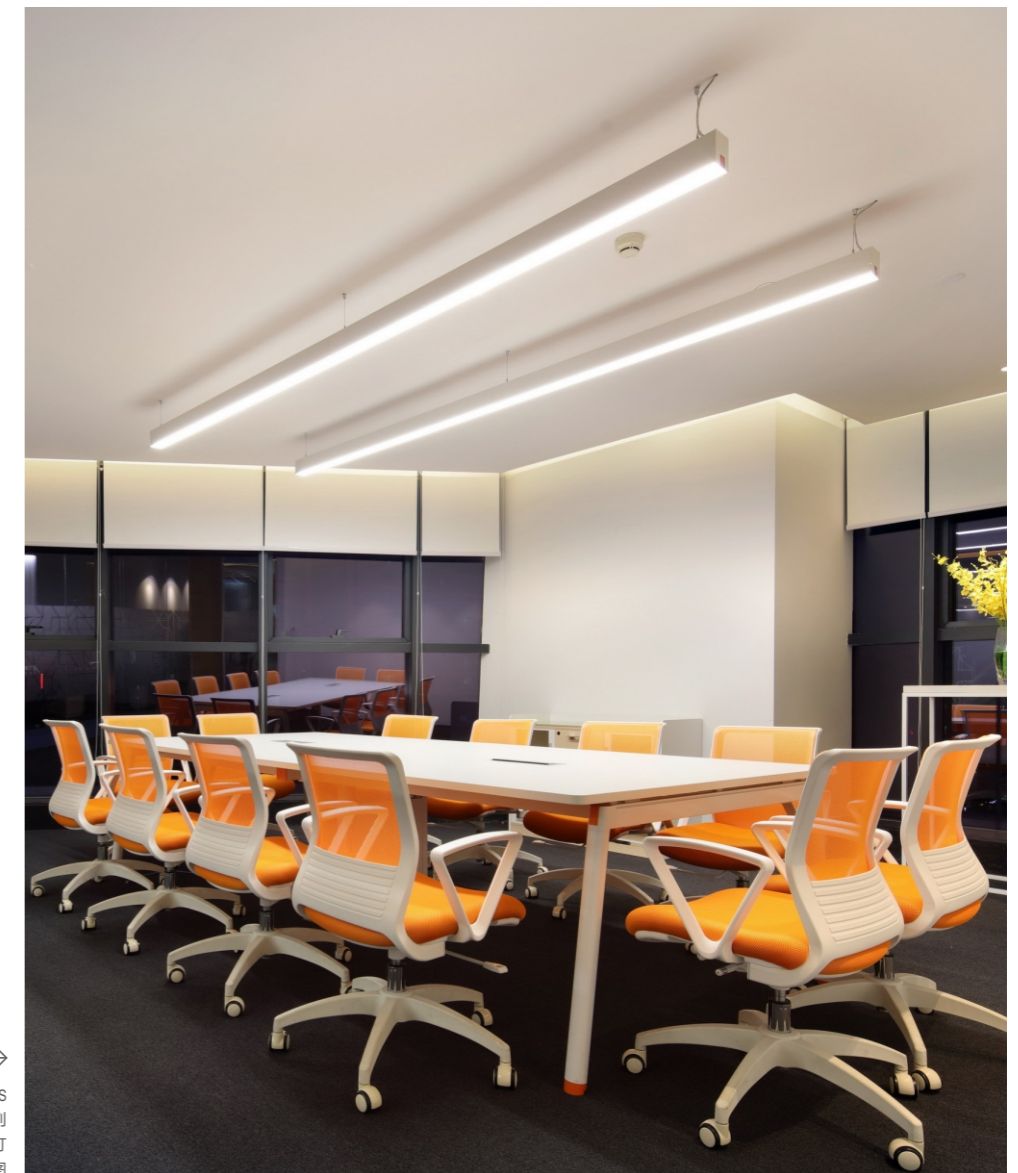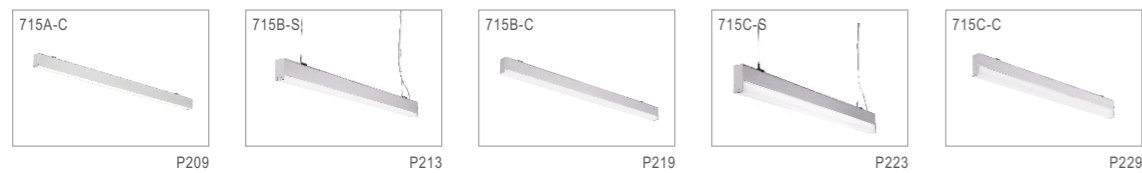

→  
Nimble-S  
尼博系列  
715A吊灯  
办公场所实景图