


## NIMBLE-S RECESSED LUMINAIRE 716A

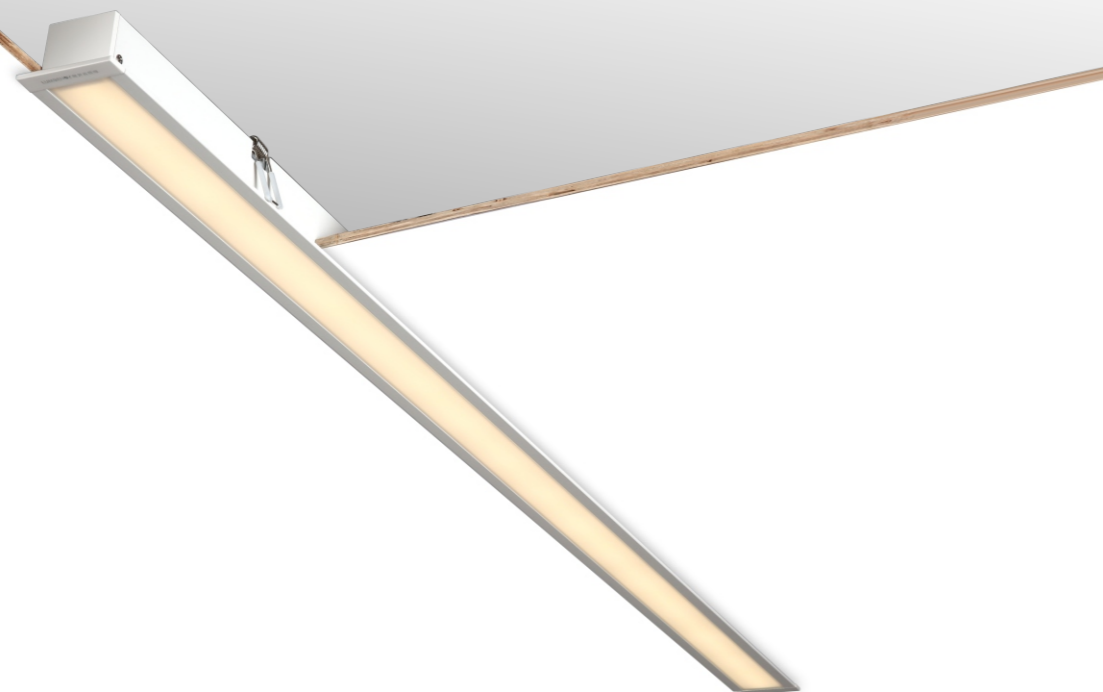

### Nimble-s 尼博

#### 716A 嵌入灯

Recessed luminaires technical data sheet

716A 尼博线形嵌入灯, 采用优质铝合金型材灯体, 压铸铝端盖, 外观尺寸比例科学, 线条硬朗美观, 结构合理, 安装维护方便灵活。PC面罩根据LED光波长开发, 出光均匀无阴影、防眩光效果好, 控光面罩与灯体完美结合使整个灯具更加美观。先进的热管理技术, 散热优异, 确保了灯具最大光输出的持续性及色温的一致性。

应用场所: 写字楼, 学校、医院、高档超市、商场、酒店、公共建筑等。

716A Nimble-S series recessed mounted with trim linear LED Luminaire, housing made of high pressure extruded aluminum construction, die-cast aluminum end caps, light body, excellent heat dissipation, UV and Corrosion resistance. Slim Compact series with Germany imported high transmittance PC diffuser specially designed for LED light source creating smooth and uniform lighting distributions. Fixed direct distributions only. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximize output lumens.

Applications: Offices, Educational Institutes, Hospitals, Warehouses, Hospitality, Retails Etc.


### 产品细节 Details










### 规格参数 Technical Data

名称: 716A 嵌入灯  
 类型: 嵌入灯  
 灯体材料: 优质铝合金  
 表面处理: 静电喷涂  
 控光面罩: PMMA  
 光源: SMD  
 整灯光效: 80 lm/W  
 显色指数: ≥83  
 色温: 3000K/4000K/6500K  
 输入电压: 220-240V  
 驱动电源: 高转换率驱动电源  
 灯具寿命: 3万小时  
 电气等级: I

**Product name:** 716A Recessed luminaire  
**Type:** Recessed luminaires  
**Housing material:** High-quality Aluminum alloy  
**Surface finish:** Electrostatic thermo-painting  
**Diffuser material:** PMMA  
**Light source:** SMD  
**Luminaire efficiency:** 80 lm/W  
**CRI:** ≥83  
**Color temperature:** 3000K / 4000K / 6500K  
**Input voltage:** 220-240V  
**Driver:** High efficiency driver  
**Lifespan:** 30000h  
**Electrical grade:** I

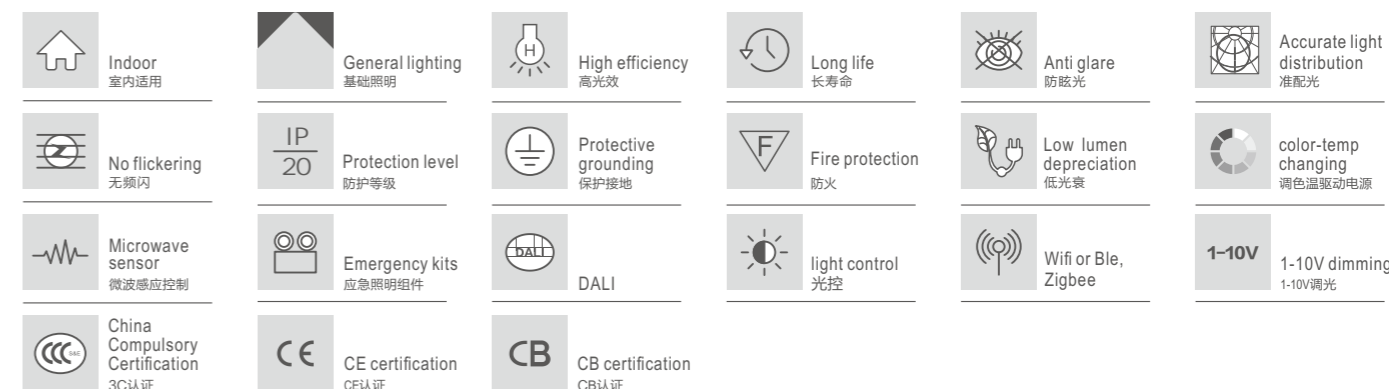








标准灯具 Standard single fitting

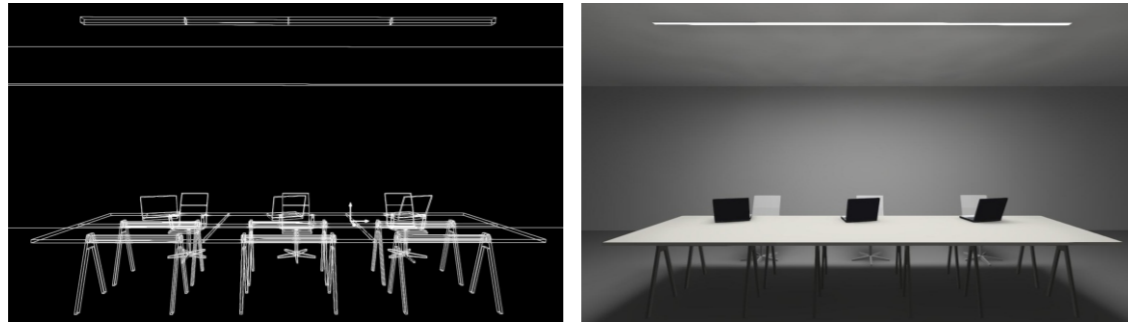

低功率 (HE)

CCT: 3000K  
Colors: White






Item No	Power   Flux	L*W*H
716A-RM1147T18W	18W / 1440 lm	1147*60*59
716A-RM1707T27W	27W / 2160 lm	1707*60*59
716A-RM2267T36W	36W / 2880 lm	2267*60*59



低功率 (HE)

CCT: 4000K  
Colors: White







Item No	Power   Flux	L*W*H
716A-RM1147T18W	18W / 1460 lm	1147*60*59
716A-RM1707T27W	27W / 2180 lm	1707*60*59
716A-RM2267T36W	36W / 2900 lm	2267*60*59



低功率 (HE)

CCT: 6500K  
Colors: White








Item No	Power   Flux	L*W*H
716A-RM1147T18W	18W / 1480 lm	1147*60*59
716A-RM1707T27W	27W / 2200 lm	1707*60*59
716A-RM2267T36W	36W / 2920 lm	2267*60*59



小功率 (HO-L)

CCT: 3000K  
Colors: White






Item No	Power   Flux	L*W*H
716A-RS1147T36W	36W / 2880 lm	1147*60*59
716A-RS1707T54W	54W / 4320 lm	1707*60*59
716A-RS2267T72W	72W / 5760 lm	2267*60*59



小功率 (HO-L)

CCT: 4000K  
Colors: White

Item No	Power   Flux	L*W*H
716A-RS1147T36W	36W / 2900 lm	1147*60*59
716A-RS1707T54W	54W / 4360 lm	1707*60*59
716A-RS2267T72W	72W / 5800 lm	2267*60*59




小功率 (HO-L)


CCT: 6500K  
Colors: White

Item No	Power   Flux	L*W*H
716A-RS1147T36W	36W / 2900 lm	1147*60*59
716A-RS1707T54W	54W / 4360 lm	1707*60*59
716A-RS2267T72W	72W / 5800 lm	2267*60*59


关联产品 Related products




P239




P245




P271



P277



P303




P309

配件 Accessories



线形光带示意图 Linear continuous connection demonstration

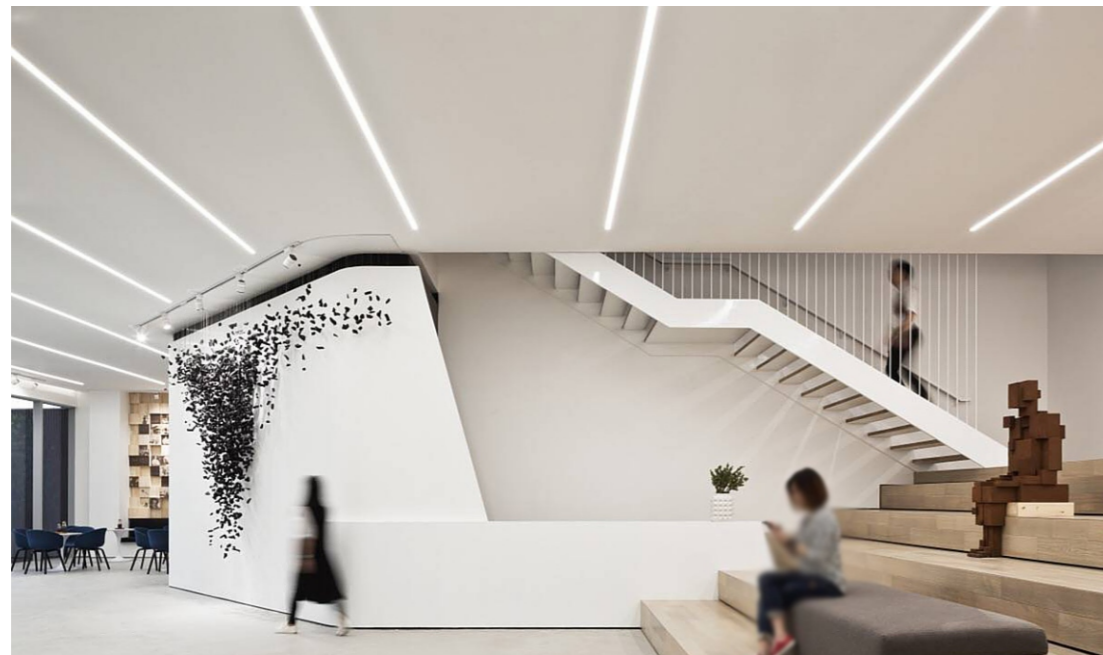


→ Nimble-S 尼博系列 716A嵌入灯 办公场所实景图


应用参考 Application reference

**Open space:** 10m x 10m x 3m; reflectance (%): ceiling80/wall50/floor20/ floor ceiling walls; illuminance is the average lux level on 0.75m working surface; "H" is the fittings installation height

**开放式空间:** 10m x 10m x 3m; 反射率(%): 天花板 80/墙壁50/地板20; 照度为 0.75m工作面平均照度; H为灯具 安装离地高度。

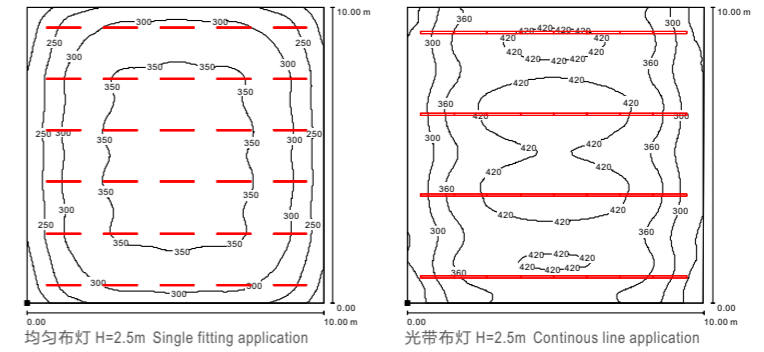

Item No	Power   Flux	Number	W/m <sup>2</sup>	H=2.8m Illuminance(Lux)
716A-RM1147T18W	18W / 1440 lm	30	5.4	312
716A-RM9600T144W	144W / 15120 lm	4	4.32	328

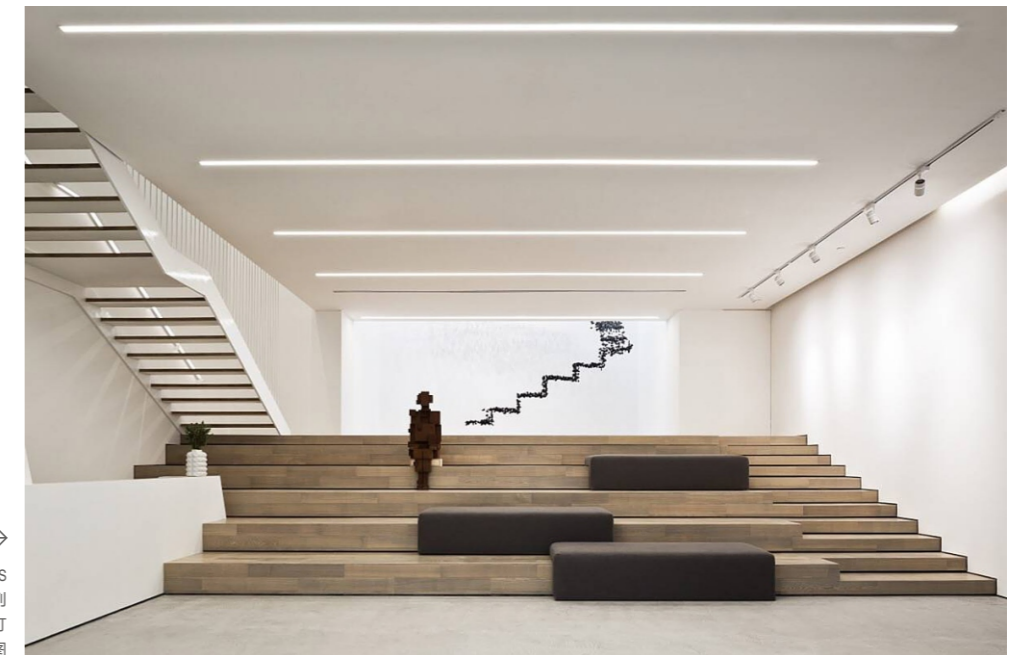

→ Nimble-S 尼博系列 716A嵌入灯 办公场所实景图