



IVAN SUSPENDED/CEILING SURFACE MOUNTED LUMINAIRE 747B

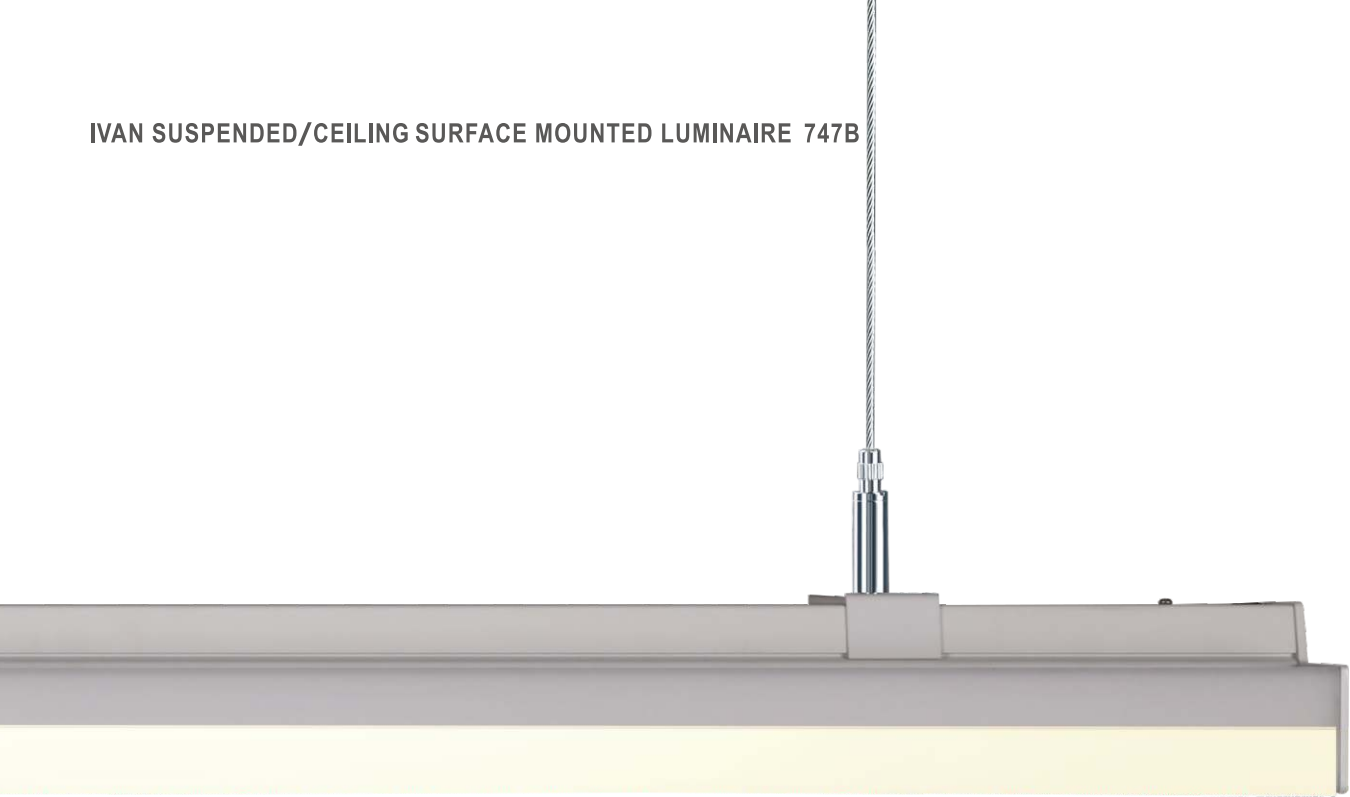

产品细节 Details

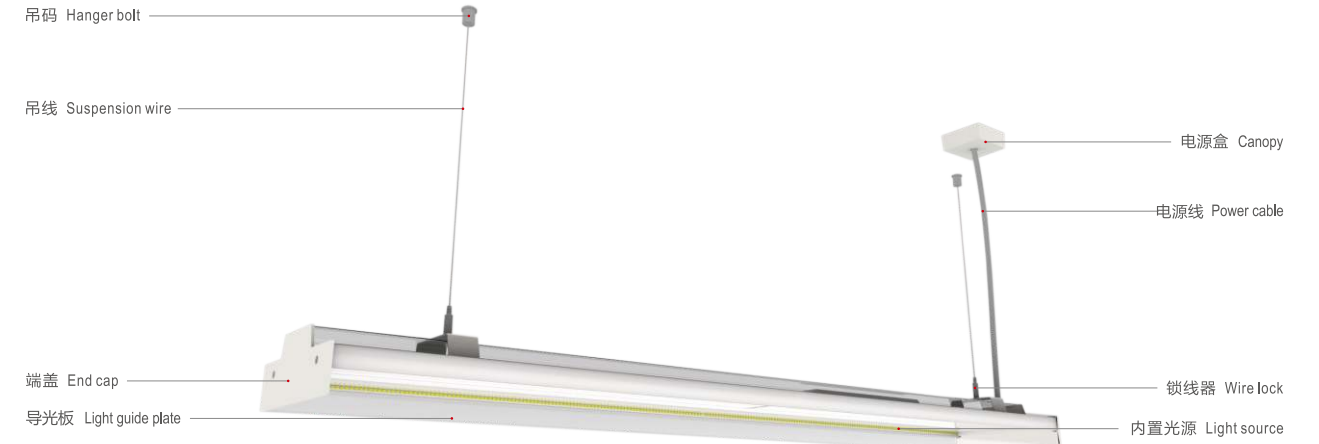

规格参数 Technical Data

名称: 747B 吊灯/吸顶灯
 类型: 吊灯/吸顶灯
 灯体材料: 优质铝合金
 表面处理: 静电烤漆
 控光面罩: PC
 光源: SMD
 整灯光效: 98 lm/W
 显色指数: ≥83
 色温: 3000K/4000K/6500K
 输入电压: 220-240V
 驱动电源: 高转换率驱动电源
 灯具寿命: 3万小时
 电气等级: I

Product name: 747B Suspended/Ceiling surface mounted luminaire
Type: Suspended/Ceiling surface mounted luminaires
Housing material: High-quality Aluminum alloy
Surface finish: Electrostatic thermo-painting
Diffuser material: PC
Light source: SMD
Luminaire efficiency: 98 lm/W
CRI: ≥83
Color temperature: 3000K / 4000K / 6500K
Input voltage: 220-240V
Driver: High efficiency driver
Lifespan: 30000h
Electrical grade: I

Ivan 艾凡

747B 吊灯/吸顶灯

Suspended/Ceiling surface mounted luminaires technical data sheet

747B 艾凡线形灯为简约式LED灯具，采用优质铝合金型材灯体，灯具线条硬朗美观、外观尺寸比例科学，结构合理，安装维护方便灵活。灯具运用防眩光灯罩控光，防眩光效果好，PC控光面罩根据LED光波长开发，整个发光面罩盖住灯体，无灯框设计，可实现180度发光。出光均匀无阴影，控光面罩与灯体完美结合使整个灯具更加美观。先进的热管理技术，散热优异，确保了灯具最大光输出的持续性及色温的一致性。单灯最长可做6000mm。




应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共建筑、车站机场、地铁等。

747B specification Grade Suspend mounted linear LED Luminaire. Housing made of high pressure extruded aluminum construction, With beautiful appearance, the scientific proportion and reasonable dimensions strong and beautiful outline. High-quality anti-glare PC diffuser is special designed for LED light wave and it covers the whole lamp body, trimless, 180 degree lighting beam angle. Uniform lighting distributions, looks more beautiful. Advanced thermal management technology to ensure consistency of LED life span, color temperature and maximize output lumens. Single lamp can do up to 6000mm.

Applications: Offices, Educational Institutes, Hospitals, Shopping malls, department stores, Hospitality, Public buildings, Stations and Airport, metro, Etc.


Indoor 室内适用	General lighting 基础照明	High efficiency 高光效	Long life 长寿命	Anti glare 防眩光	Accurate light distribution 准配光
No flickering 无频闪	IP 54 Protection level 防护等级	Protective grounding 保护接地	Fire protection 防火	Low lumen depreciation 低光衰	color-temp changing 调色温驱动电源
Microwave sensor 微波感应控制	Emergency kits 应急照明组件	DALI	light control 光控	Wifi or Ble, Zigbee	1-10V 1-10V dimming 1-10V调光
China Compulsory Certification 3C认证	CE certification CE认证	CB certification CB认证			

标准灯具 Standard single fitting

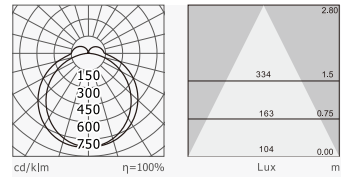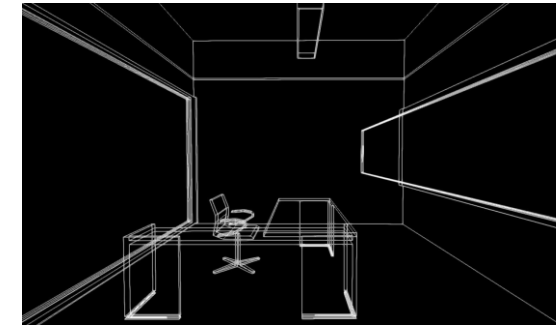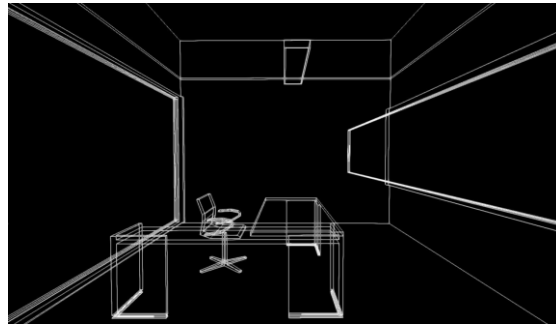


下出光吊灯
(Down light only)
CCT: 3000K
Colors: White

Item No	Power Flux	L*W*H
747B-SM1140T18W	18W / 1764 lm	1140*198*78
747B-SM1700T27W	27W / 2646 lm	1700*198*78
747B-SM1140T36W	36W / 3528 lm	1140*198*78
747B-SM1700T54W	54W / 5292 lm	1700*198*78




下出光吊灯
(Down light only)
CCT: 4000K
Colors: White

Item No	Power Flux	L*W*H
747B-SM1140T18W	18W / 1784 lm	1140*198*78
747B-SM1700T27W	27W / 2666 lm	1700*198*78
747B-SM1140T36W	36W / 3548 lm	1140*198*78
747B-SM1700T54W	54W / 5312 lm	1700*198*78

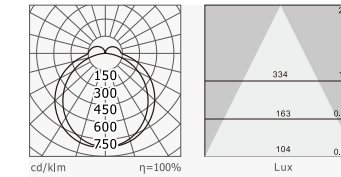



吸顶灯
(Up&down light)
CCT: 3000K
Colors: White

Item No	Power Flux	L*W*H
747B-CM1140T18W	18W / 1764 lm	1140*198*78
747B-CM1700T27W	27W / 2646 lm	1700*198*78
747B-CM1140T36W	36W / 3528 lm	1140*198*78
747B-CM1700T54W	54W / 5292 lm	1700*198*78





吸顶灯
(Up&down light)
CCT: 4000K
Colors: White

Item No	Power Flux	L*W*H
747B-CM1140T18W	18W / 1784 lm	1140*198*78
747B-CM1700T27W	27W / 2666 lm	1700*198*78
747B-CM1140T36W	36W / 3548 lm	1140*198*78
747B-CM1700T54W	54W / 5312 lm	1700*198*78

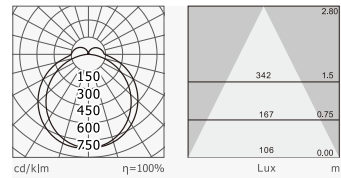

下出光吊灯
(Down light only)
CCT: 6500K
Colors: White

Item No	Power Flux	L*W*H
747B-SM1140T18W	18W / 1804 lm	1140*198*78
747B-SM1700T27W	27W / 2686 lm	1700*198*78
747B-SM1140T36W	36W / 3568 lm	1140*198*78
747B-SM1700T54W	54W / 5332 lm	1700*198*78

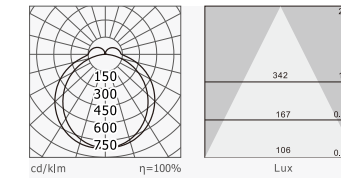

吸顶灯
(Up&down light)
CCT: 6500K
Colors: White

Item No	Power Flux	L*W*H
747B-CM1140T18W	18W / 1804 lm	1140*198*78
747B-CM1700T27W	27W / 2686 lm	1700*198*78
747B-CM1140T36W	36W / 3568 lm	1140*198*78
747B-CM1700T54W	54W / 5332 lm	1700*198*78

关联产品 Related products




P315




P315



P321



P327




P327

配件 Accessories




线形无影光带示意图 Shadow-free linear continuous connection demonstration

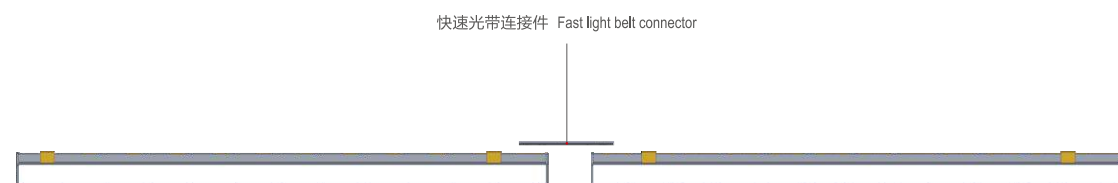


应用参考 Application reference

Open space: 10m x 10m x 3m; reflectance (%): ceiling80/wall50/floor20/ floor ceiling walls; illuminance is the average lux level on 0.75m working surface; "H" is the fittings installation height

开放式空间: 10m x 10m x 3m; 反射率(%): 天花板 80/墙壁50/地板20; 照度为 0.75m工作面平均照度; H为灯具安装离地高度。

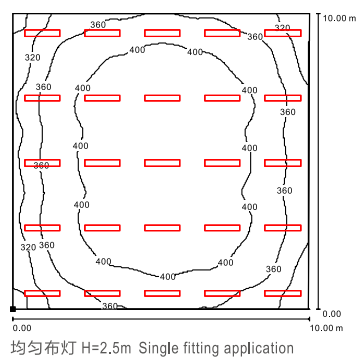

Item No	Power Flux	Number	W/m ²	H=2.8m Illuminance(Lux)
747B-SM1140T27W	27W / 2646 lm	25	5	382

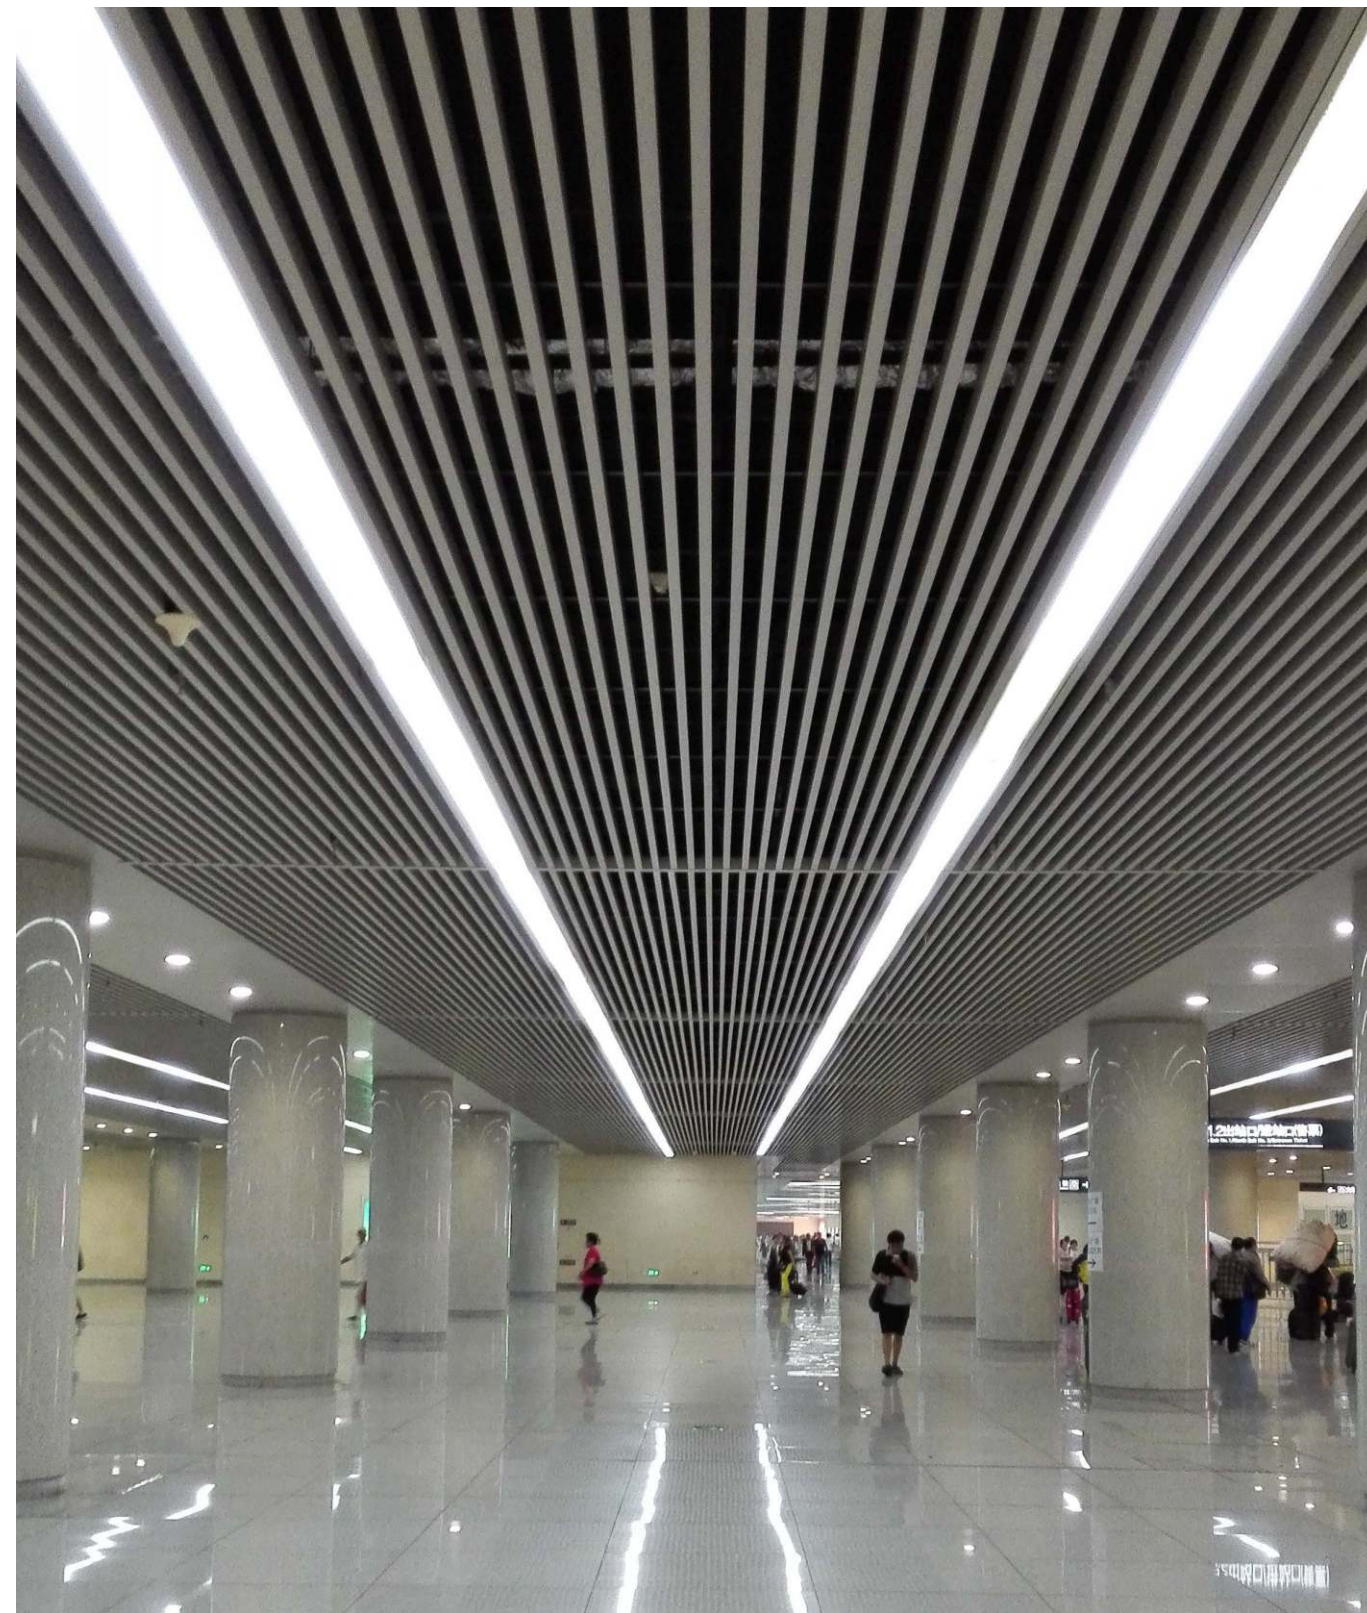

↑
Ivan 艾凡系列 747B吸顶灯 公共场所实景图